



DC AXIAL FANS



DA SERIES 120×120×32 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 273g (9.63 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DA12032_48E	-FG/RD	B	48	36.0 to 56.0	0.05	2.40	1900	1.596	56.38	3.52	0.138	32.0	160000	
DA12032_48L	-FG/RD	B	48	36.0 to 56.0	0.07	3.36	2500	2.145	75.75	6.32	0.248	40.5	140000	
DA12032_48M	-FG/RD	B	48	36.0 to 56.0	0.09	4.32	3150	2.714	95.85	9.98	0.393	47.0	120000	
* DA12032_48H	-FG/RD	B	48	36.0 to 56.0	0.14	6.72	3800	3.299	116.53	14.18	0.558	51.0	100000	
* DA12032_48U	-FG/RD	B	48	36.0 to 56.0	0.23	11.04	4400	3.782	133.56	18.32	0.721	55.5	90000	

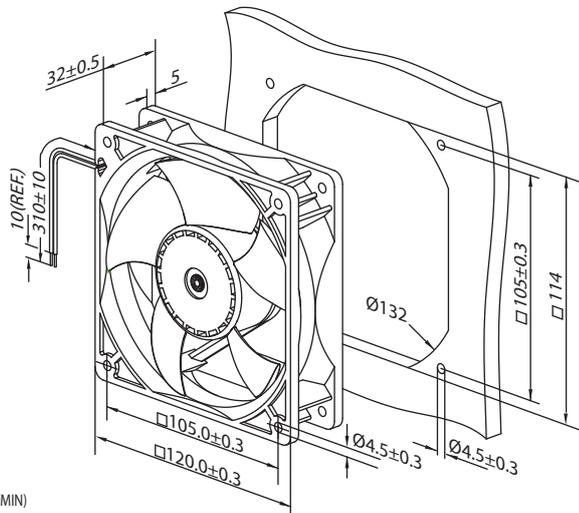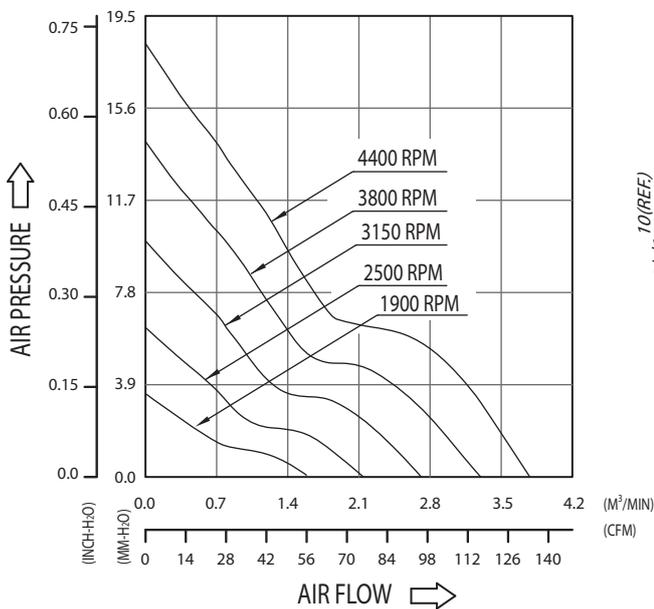



DC AXIAL FANS



DAPA SERIES 120×120×32 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 270g (9.523 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DAPA1232_8U	-FG / RD	B	48	36.0 to 75.0	0.23	11.04	4400	4.176	147.50	13.05	0.513	55.8	70000
DAPA1232_8S	-FG / RD	B	48	36.0 to 75.0	0.55	26.40	6500	5.562	196.43	46.60	1.834	65.0	70000

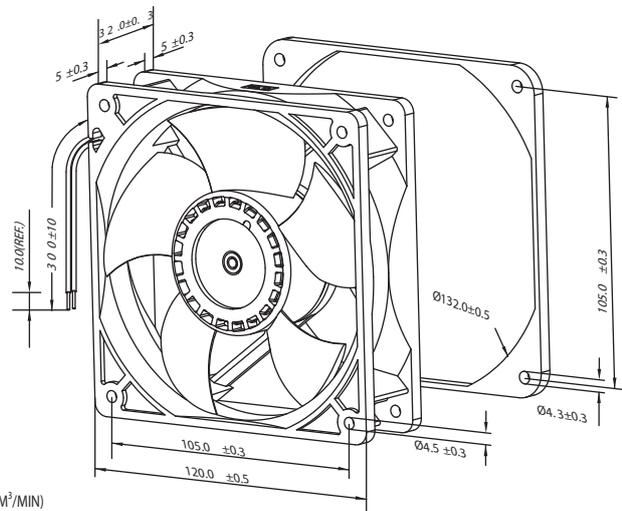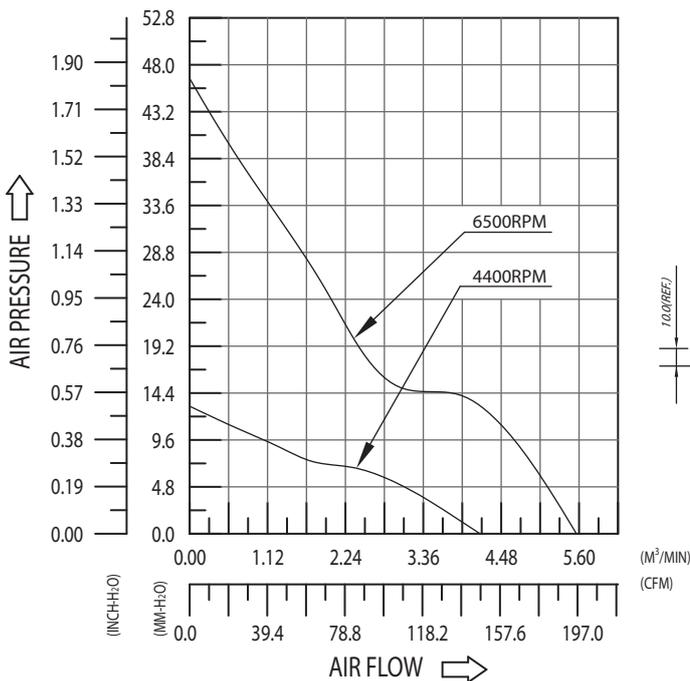

DC AXIAL FANS



DATA SERIES 120×120×32 mm 12v,48v

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 7 Blades
- * Rotational direction CCW view from front face
- * Weight: 240g (8.47 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DATA1232_2E	-FG/RD	B	12	7.0 to 13.2	0.15	1.80	1900	2.05	72.3	3.1	0.12	33.1	140000	
DATA1232_2L	-FG/RD	B	12	7.0 to 13.2	0.27	3.24	2500	2.70	95.2	5.3	0.21	41.4	120000	
DATA1232_2M	-FG/RD	B	12	7.0 to 13.2	0.44	5.28	3150	3.40	119.9	8.4	0.33	48.1	100000	
* DATA1232_2H	-FG/RD	B	12	7.0 to 13.2	0.72	8.64	3800	4.10	144.7	12.3	0.48	53.3	100000	
* DATA1232_2U	-FG/RD	B	12	7.0 to 13.2	1.11	13.32	4300	4.64	163.7	15.7	0.62	56.8	100000	
DATA1232_8E	-FG/RD	B	48	28.0 to 56.0	0.06	2.88	1900	2.05	72.3	3.1	0.12	33.1	140000	
DATA1232_8L	-FG/RD	B	48	28.0 to 56.0	0.08	3.84	2500	2.70	95.2	5.3	0.21	41.4	120000	
* DATA1232_8M	-FG/RD	B	48	28.0 to 56.0	0.13	6.24	3150	3.40	119.9	8.4	0.33	48.1	100000	
DATA1232_8H	-FG/RD	B	48	28.0 to 56.0	0.19	9.12	3800	4.10	144.7	12.3	0.48	53.3	100000	
* DATA1232_8U	-FG/RD	B	48	28.0 to 56.0	0.28	13.44	4300	4.64	163.7	15.7	0.62	56.8	100000	

