



DC AXIAL FANS

DATA SERIES 200×70 mm 48v

- * Material: Impeller: Plastic (UL 94V-0) & Frame: Diecast Aluminum
- * Lead Wires: UL 1007 AWG #22 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CW view from front face
- * Weight: 2000g (70.55 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DATA2070_8L	-FG/RD	ϕ	48	28.0 to 56.0	0.39	18.72	2200	7.079	250.0	12.4	0.488	44.4	70000	
DATA2070_8M	-FG/RD	ϕ	48	28.0 to 56.0	0.52	24.96	2700	8.656	305.7	18.5	0.728	49.1	70000	
* DATA2070_8H	-FG/RD	ϕ	48	28.0 to 56.0	0.8	38.4	3400	11.117	392.6	30.4	1.197	55.5	70000	
* DATA2070_8U	-FG/RD	ϕ	48	28.0 to 56.0	1.37	65.76	4100	13.451	475.0	43.5	1.713	60	70000	
* DATA2070_8S	-FG/RD	ϕ	48	28.0 to 56.0	2.1	100.8	4800	15.843	559.5	56.0	2.205	65	70000	

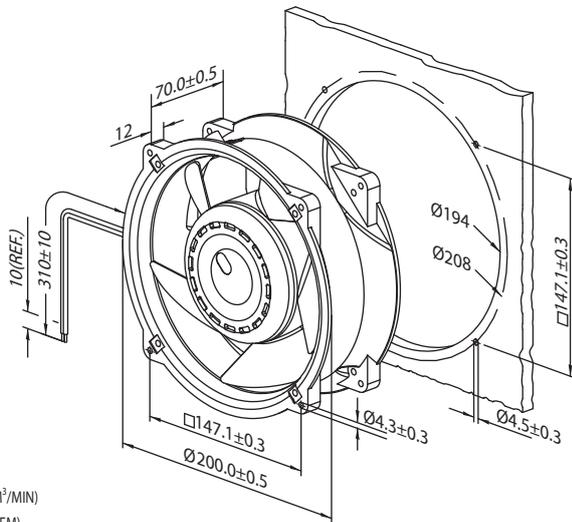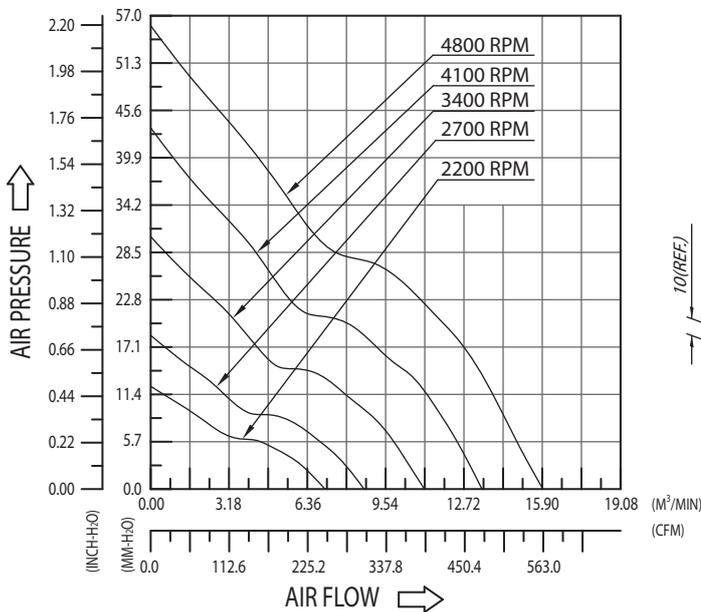



DC AXIAL FANS



DBTB SERIES 200×70 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0) / Die-Casting Aluminum
- * Lead Wires: UL 1007 AWG #22 or Equivalent
- * Impeller: 7 Blades
- * Rotational direction CW view from front face
- * Weight: 2250g (79.365 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBTB2070_8S	-FG / RD	B	48	36.0 to 72.0	10.0	480.0	7400	29.17	1030.0	107.5	4.232	79.0	70000

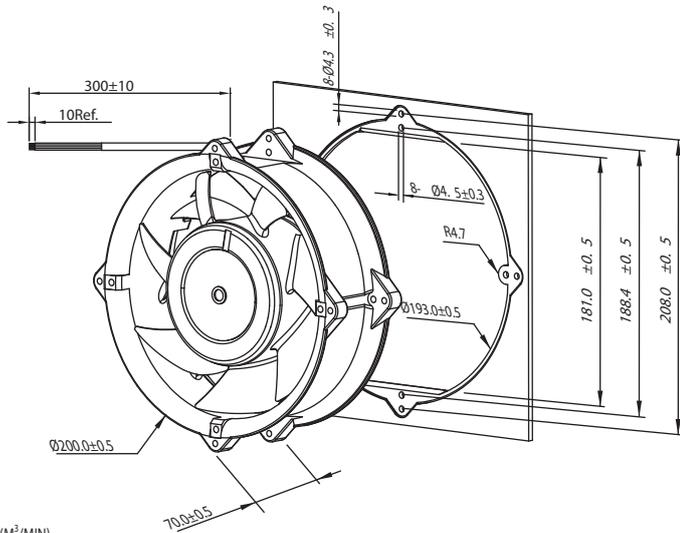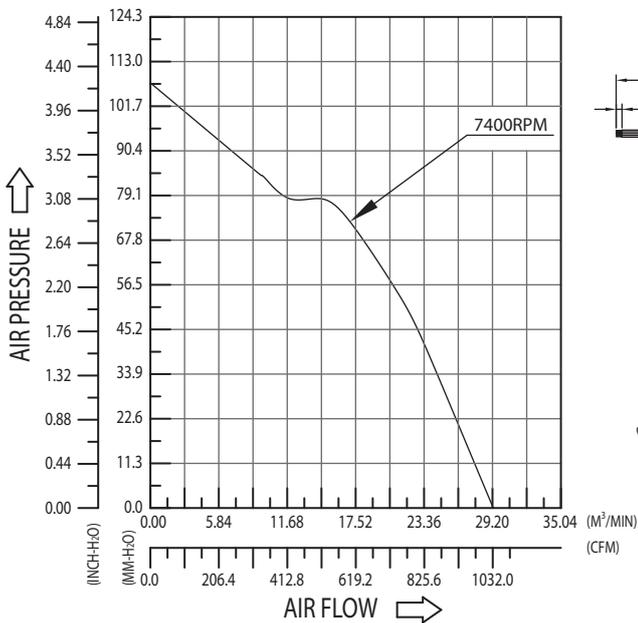

DC AXIAL FANS

DYTA SERIES 200×70 mm



- * Material: Impeller & Frame: Plastic (UL 94V-0) / Die-Casting Aluminum
- * Lead Wires: UL 1430 AWG #20 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CW view from front face
- * Weight: 2000g (70.546 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DYTA2070_8S	-FG / RD	B	48	36.0 to 72.0	4.30	206.4	5800	20.828	735.55	90.0	3.543	71.0	70000
DYTA2070_8U	-FG / RD	B	48	36.0 to 72.0	2.65	127.2	5000	17.955	634.09	66.88	2.633	67.5	70000
DYTA2070_8H	-FG / RD	B	48	36.0 to 72.0	1.79	85.92	4300	15.441	545.32	49.46	1.947	64.5	70000
DYTA2070_8M	-FG / RD	B	48	36.0 to 72.0	1.18	56.64	3600	12.927	456.54	34.67	1.365	60.5	70000
DYTA2070_8L	-FG / RD	B	48	36.0 to 72.0	0.65	31.2	2700	9.696	342.41	19.5	0.767	54.5	70000
DYTA2070_8E	-FG / RD	B	48	36.0 to 72.0	0.48	23.04	1900	6.823	240.95	9.66	0.380	46.5	70000

