



DC AXIAL FANS



DB SERIES 38×38×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 40g (1.41 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DB03828_12L	-FG / RD	B	12	7.0 to 13.2	0.11	1.32	8000	0.267	9.44	10.02	0.394	38.0	120000
DB03828_12M	-FG / RD	B	12	7.0 to 13.2	0.14	1.68	10000	0.353	12.46	15.88	0.625	44.0	120000
DB03828_12H	-FG / RD	B	12	7.0 to 13.2	0.29	3.48	13000	0.462	16.30	25.91	1.020	51.0	110000
DB03828_12U	-FG / RD	B	12	7.0 to 13.2	0.50	6.00	15000	0.543	19.16	34.71	1.367	55.0	100000
* DB03828_12S	-FG / RD	B	12	7.0 to 13.2	0.65	7.80	17000	0.589	20.83	42.41	1.669	59.0	90000

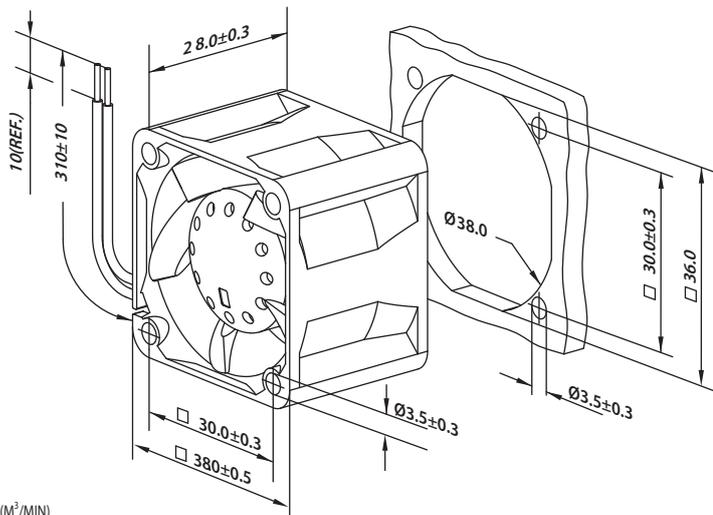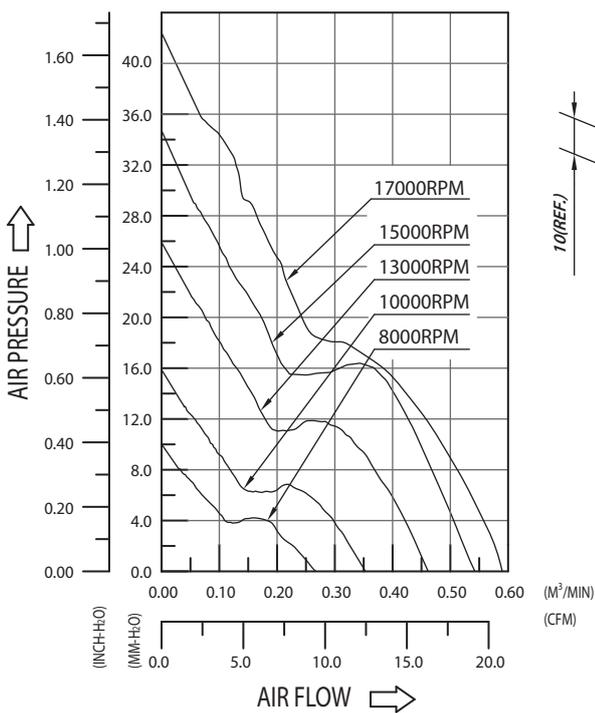

DC AXIAL FANS



DBTA SERIES 38×38×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from inlet side
- * Weight: 40g (1.28 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBTA0328B2E	-FG/RD	B	12	5.0 to 13.2	0.14	1.68	10000	0.315	11.14	13.63	0.537	40.0	70000
DBTA0328B2L	-FG/RD	B	12	5.0 to 13.2	0.18	2.16	12000	0.387	13.70	20.14	0.793	46.0	70000
DBTA0328B2M	-FG/RD	B	12	5.0 to 13.2	0.24	2.88	14000	0.434	15.38	27.50	1.083	50.0	70000
DBTA0328B2H	-FG/RD	B	12	5.0 to 13.2	0.32	3.84	16000	0.494	17.48	37.05	4.459	54.0	70000
DBTA0328B2U	-FG/RD	B	12	5.0 to 13.2	0.42	5.04	18000	0.558	19.75	46.72	1.839	57.0	70000
* DBTA0328B2S	-FG/RD	B	12	5.0 to 13.2	0.55	6.6	20000	0.629	22.21	58.92	2.482	58.0	70000

