



DC AXIAL FANS




DBTA SERIES 40×40×20 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 7 Blades
- * Rotational direction CCW view from front face
- * Weight: 25g (0.88 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DBTA0420B_2E	-FG / RD	B	12	7.0 to 13.2	0.08	0.96	8000	0.267	9.43	8.92	0.351	32.9	70000	
DBTA0420B_2L	-FG / RD	B	12	7.0 to 13.2	0.11	1.32	10000	0.332	11.73	13.96	0.549	40.0	70000	
DBTA0420B_2M	-FG / RD	B	12	7.0 to 13.2	0.17	2.04	12000	0.405	14.31	20.06	0.789	44.3	70000	
DBTA0420B_2H	-FG / RD	B	12	7.0 to 13.2	0.25	3.00	14000	0.476	16.82	27.34	1.073	48.9	70000	
* DBTA0420B_2U	-FG / RD	B	12	7.0 to 13.2	0.41	4.92	16000	0.561	19.82	36.55	1.438	52.9	70000	

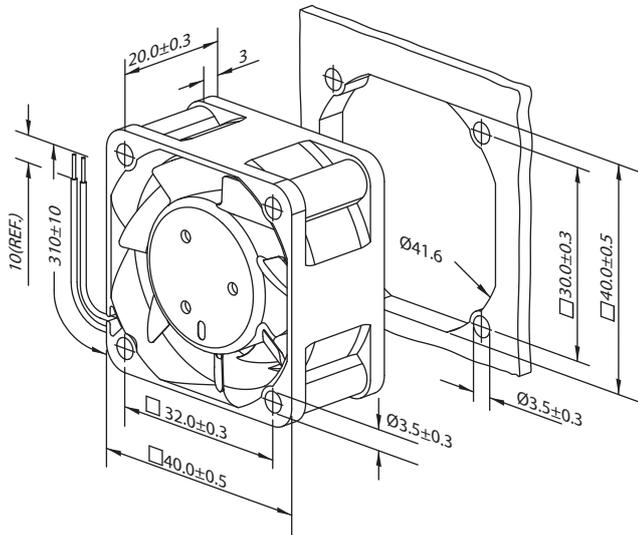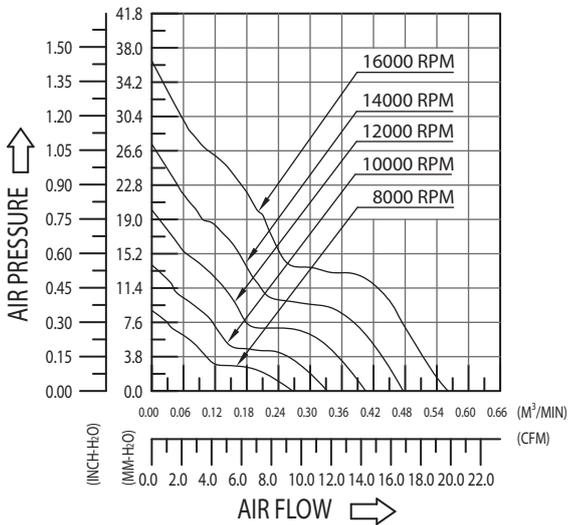



DC AXIAL FANS

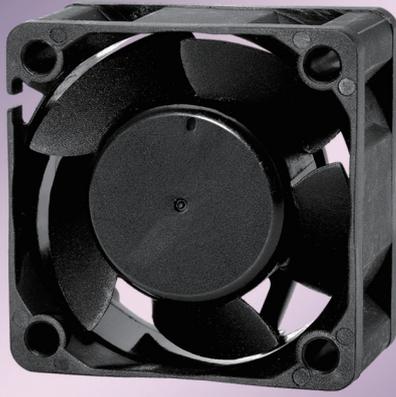


DS SERIES 40×40×20 mm 12v,24v

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 35g (1.23 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
* DS04020_12L	-FG/RD	<u>B</u> <u>R</u>	12	7.0 to 13.2	0.10	1.20	4500	0.155	5.48	2.64	0.104	22.3	70000
DS04020_12M	-FG/RD	<u>B</u> <u>R</u>	12	7.0 to 13.2	0.15	1.80	6200	0.208	7.35	5.12	0.202	26.5	70000
DS04020_12H	-FG/RD	<u>B</u> <u>R</u>	12	7.0 to 13.2	0.20	2.40	7600	0.265	9.37	7.46	0.294	32.2	70000
DS04020_12U	-FG/RD	<u>B</u> <u>R</u>	12	7.0 to 13.2	0.25	3.00	9000	0.312	11.01	9.88	0.389	36.7	70000
DS04020_12S	-FG/RD	<u>B</u>	12	7.0 to 13.2	0.40	4.80	13000	0.450	15.90	20.31	0.799	46.2	70000
DS04020_24S	-FG/RD	<u>B</u>	24	10.0 to 26.4	0.30	7.20	10500	0.363	12.8	12.68	0.499	40.2	70000

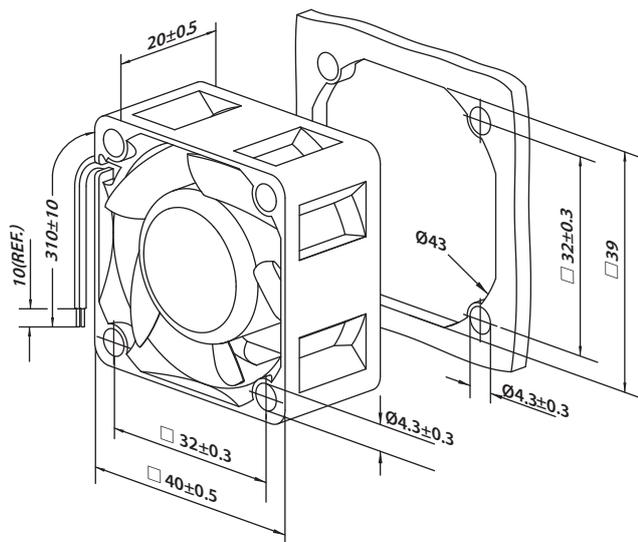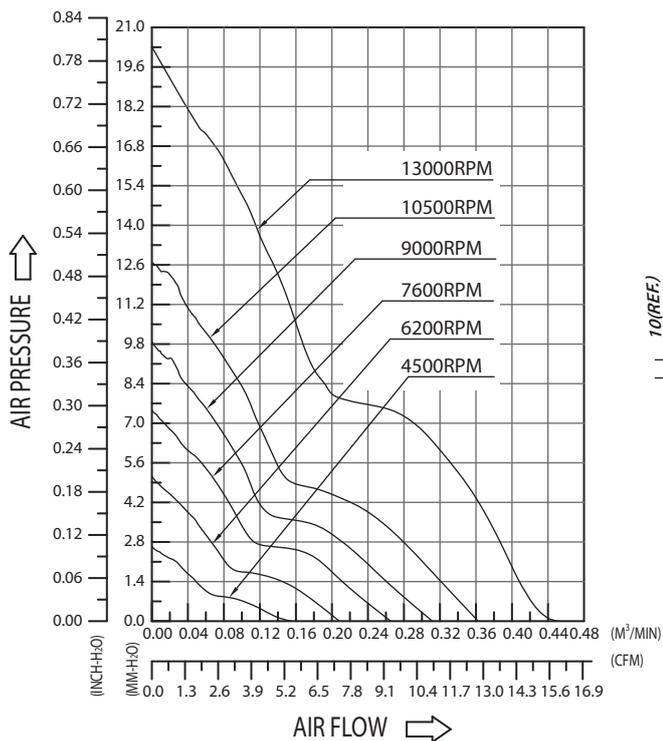

DC AXIAL FANS

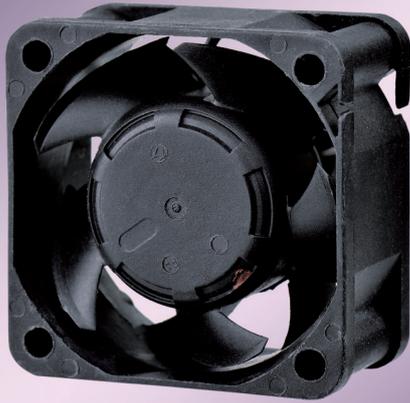

DYTB^{SERIES} 40×40×20 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 35.5g (1.252 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DYTB0420_2E	-FG / RD	B	12	7.0 to 15.0	0.12	1.44	9000	0.308	10.88	8.67	0.341	36.1	70000
DYTB0420_2L	-FG / RD	B	12	7.0 to 15.0	0.17	2.04	11000	0.369	13.03	14.83	0.583	41.8	70000
DYTB0420_2M	-FG / RD	B	12	7.0 to 15.0	0.21	2.52	13000	0.439	15.52	20.42	0.803	46.5	70000
DYTB0420_2H	-FG / RD	B	12	7.0 to 15.0	0.29	3.48	15000	0.518	18.32	27.04	1.064	49.6	70000
DYTB0420_2U	-FG / RD	B	12	7.0 to 15.0	0.40	4.80	17000	0.591	20.89	34.95	1.376	51.5	70000
DYTB0420_2S	-FG / RD	B	12	7.0 to 15.0	0.47	5.64	18000	0.632	22.33	36.67	1.443	52.9	70000
DYTB0420_2F	-FG / RD	B	12	7.0 to 15.0	0.50	6.60	19000	0.661	23.35	42.85	1.687	54.0	70000

