




DC AXIAL FANS

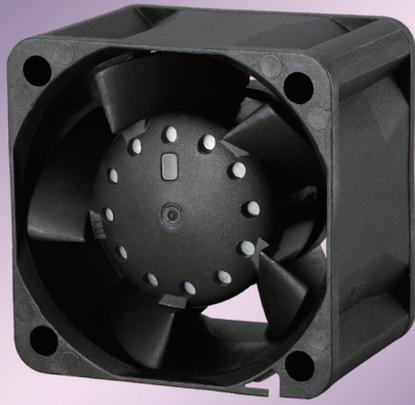


DB SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 40g (1.41 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DB04028_12L	-FG / RD	B	12	7.0 to 13.2	0.14	1.68	8000	0.401	13.86	11.60	0.456	40.0	120000
DB04028_12M	-FG / RD	B	12	7.0 to 13.2	0.23	2.76	9500	0.449	15.85	17.57	0.692	45.0	120000
DB04028_12H	-FG / RD	B	12	7.0 to 13.2	0.38	4.56	11000	0.542	18.73	23.38	0.920	50.5	110000
DB04028_12U	-FG / RD	B	12	7.0 to 13.2	0.55	6.60	13000	0.673	23.78	33.65	1.324	54.0	100000
* DB04028_12S	-FG / RD	B	12	7.0 to 13.2	0.64	7.68	15000	0.703	24.82	41.61	1.638	58.0	100000

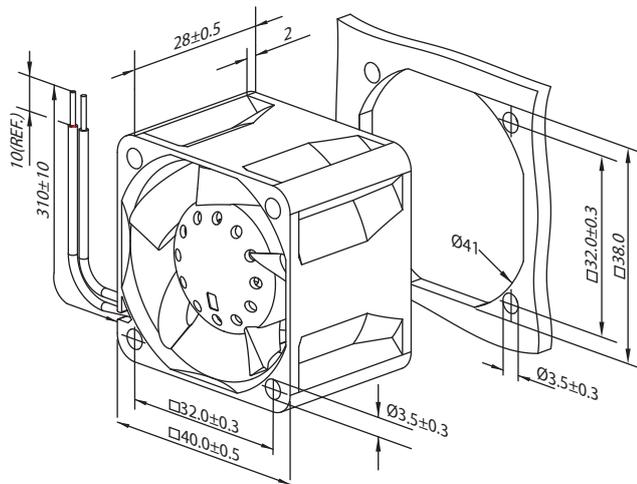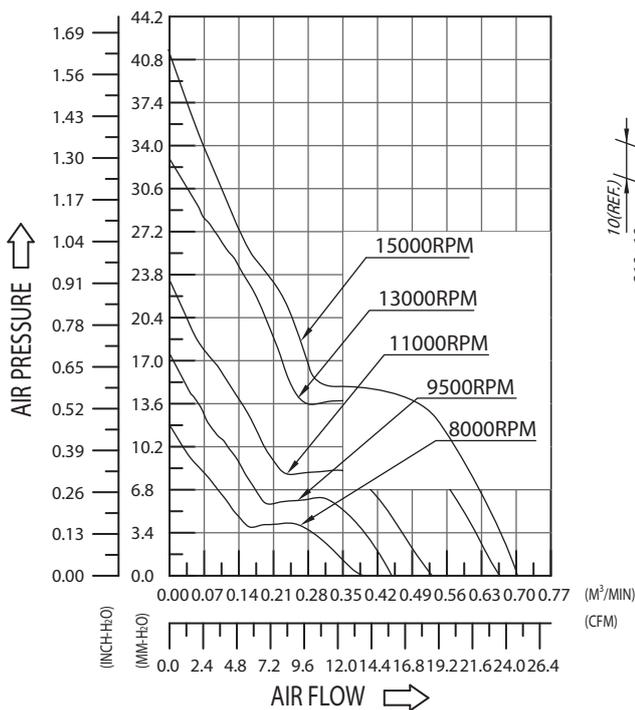



DC AXIAL FANS

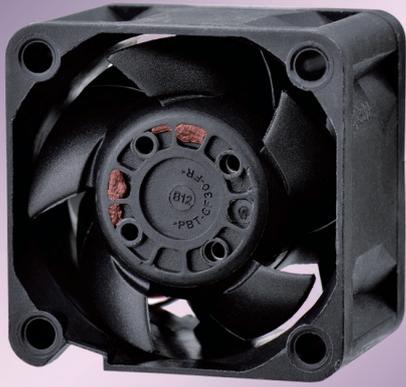

DBPB SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 42g (1.05 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPB0428_2E	-FG / RD	B	12	7.0 to 13.2	0.46	5.52	17000	0.606	21.42	39.76	1.565	54.5	70000
DBPB0428_2L	-FG / RD	B	12	7.0 to 13.2	0.61	7.32	19000	0.696	24.60	45.21	1.780	57.5	70000
DBPB0428_2M	-FG / RD	B	12	7.0 to 13.2	0.79	9.48	21000	0.757	26.75	57.61	2.268	59.2	70000
DBPB0428_2H	-FG / RD	B	12	7.0 to 13.2	1.10	14.4	23000	0.823	29.06	69.39	2.732	62.1	70000
DBPB0428_2U	-FG / RD	B	12	7.0 to 13.2	1.40	16.8	24500	0.887	31.35	82.2	3.236	63.1	70000

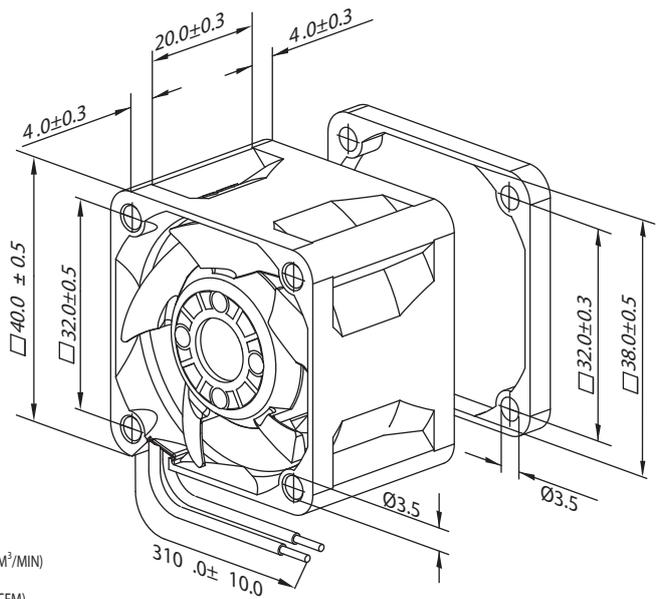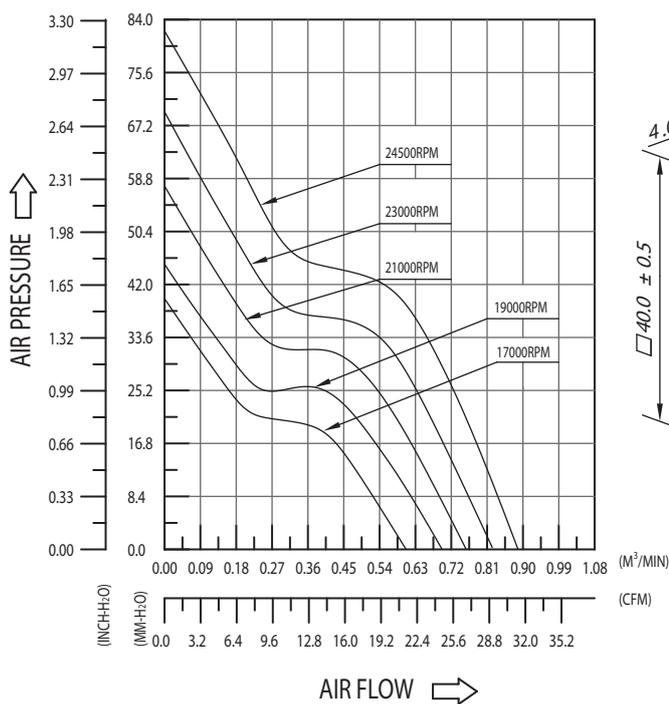



DC AXIAL FANS

DBPE SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 52g (1.83 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPE0428_2M	-FG / RD	B	12	7.0 to 13.2	0.38	4.56	15000	0.544	19.20	36.23	1.426	52.5	70000

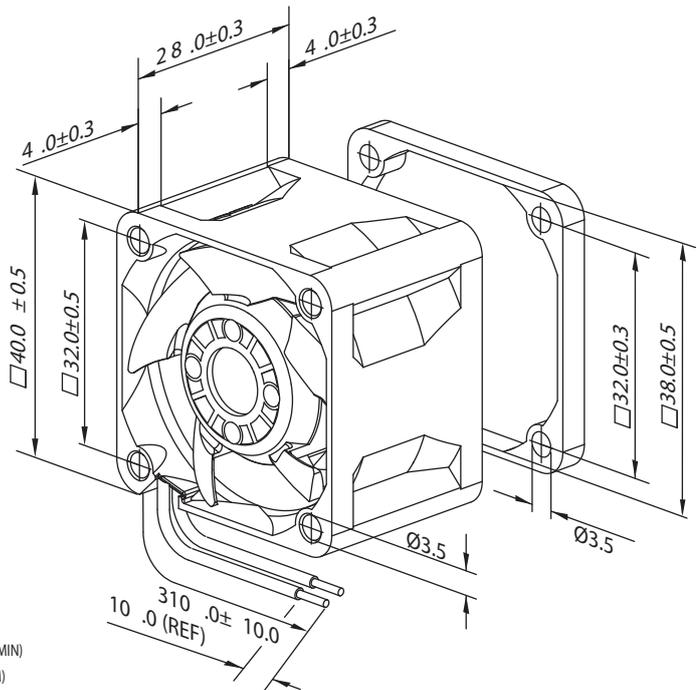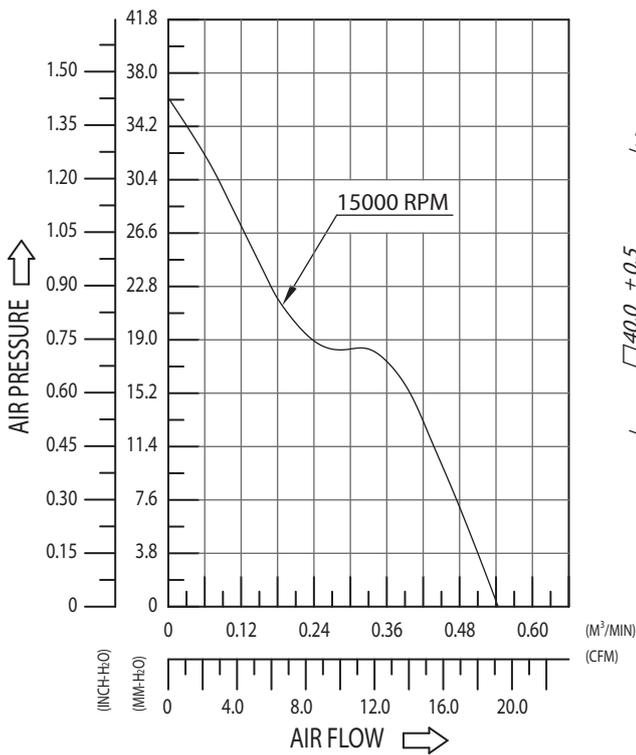



DC AXIAL FANS



DBPF SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 10368 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 46g (1.62 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPF0428_2U	-FG / RD	B	12	10.8 to 13.2	1.53	18.36	24000	0.956	33.67	103.44	4.072	64.0	70000

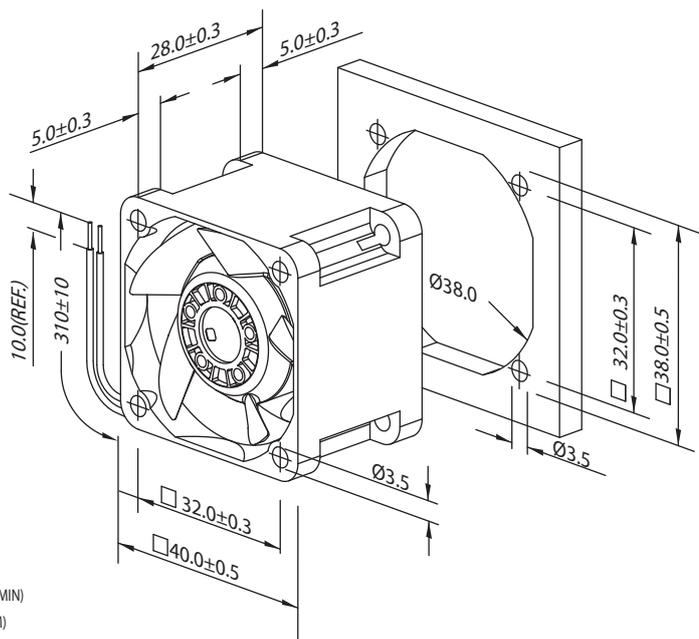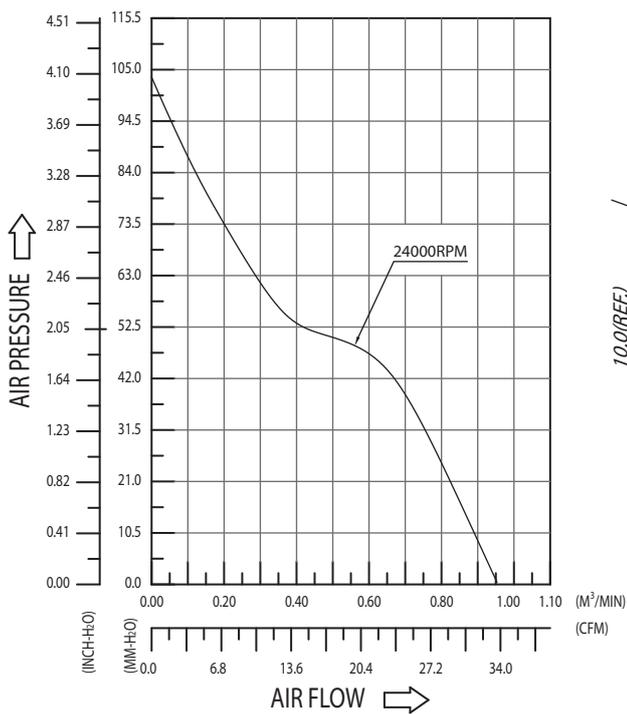



DC AXIAL FANS

DBPG SERIES 40×40×28 mm


- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 54g (1.90 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPG0428_2U	-FG / RD	B	12	10.8 to 13.2	1.00	12.00	24800	0.745	26.31	96.91	3.82	63.5	70000

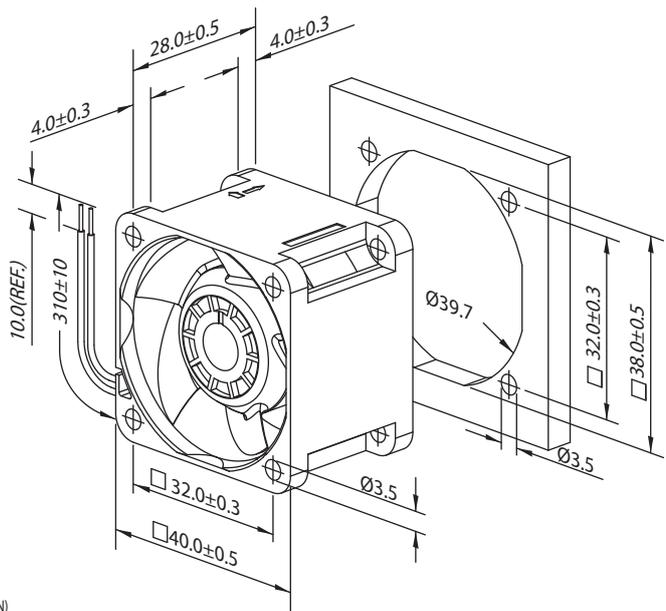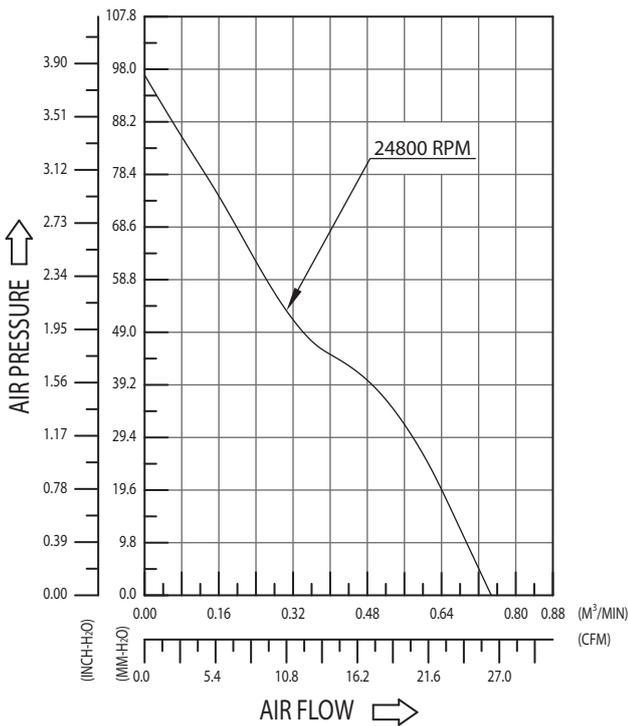



DC AXIAL FANS

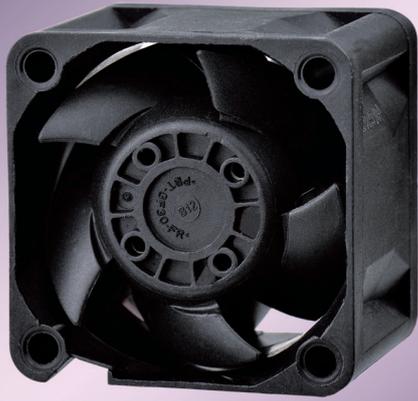


DBPH SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 48g (1.69 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DBPH0428_25	-FG / RD	B	12	7.0 to 13.2	1.7	20.4	26500	0.961	33.92	101.4	3.992	64.5	70000	

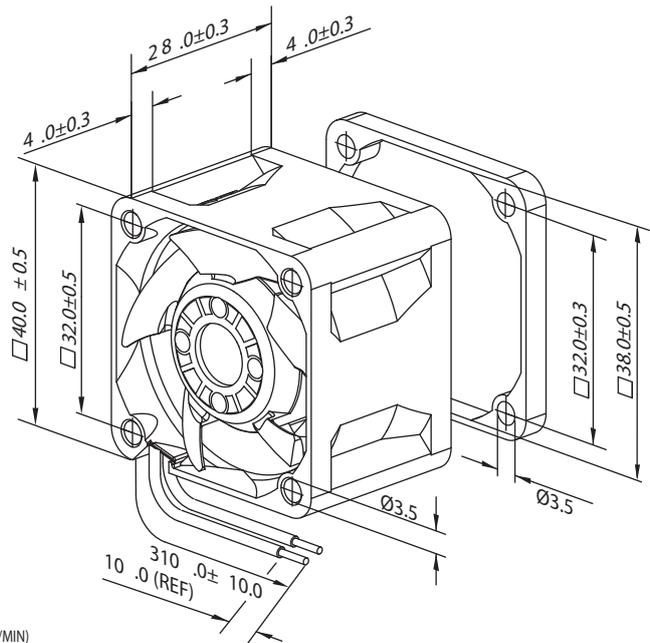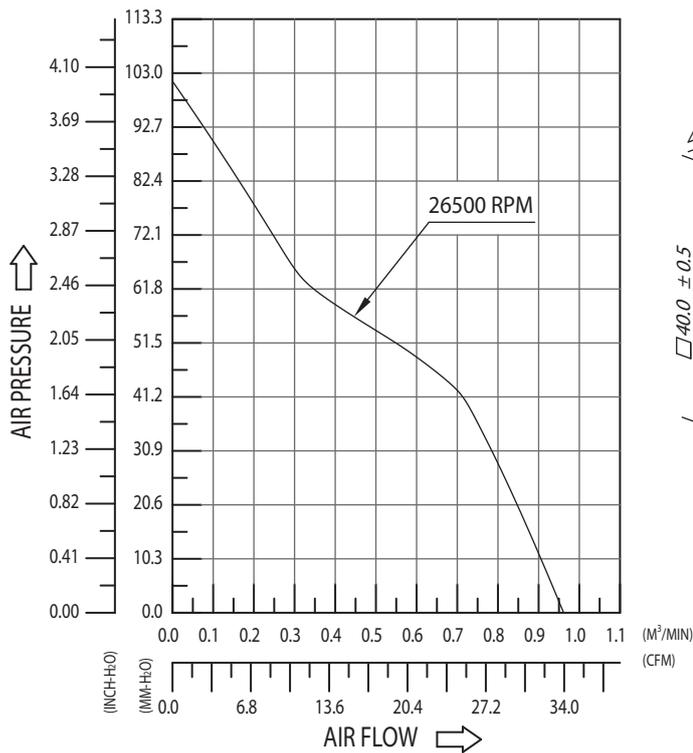


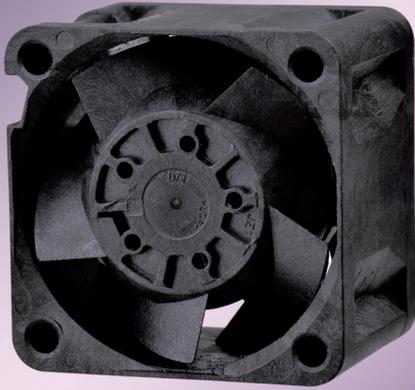


DC AXIAL FANS

DBPK SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 45g (1.59 OZ)


MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DBPK0428_2E	-FG / RD	B	12	7.0 to 13.2	0.50	6.00	16000	0.601	21.91	41.81	1.646	54.0	70000	
DBPK0428_2L	-FG / RD	B	12	7.0 to 13.2	0.60	7.20	18000	0.671	23.69	54.47	2.140	57.0	70000	
DBPK0428_2M	-FG / RD	B	12	7.0 to 13.2	1.00	12.00	21000	0.778	27.48	73.21	2.88	60.0	70000	
DBPK0428_2H	-FG / RD	B	12	7.0 to 13.2	1.20	14.40	23000	0.856	30.50	86.67	3.412	62.5	70000	
DBPK0428_2U	-FG / RD	B	12	7.0 to 13.2	1.40	16.80	25000	0.976	34.50	105.31	4.146	64.0	70000	
DBPK0428_2S	-FG / RD	B	12	7.0 to 13.2	2.30	27.60	30000	1.107	39.09	145.39	5.724	69.5	70000	

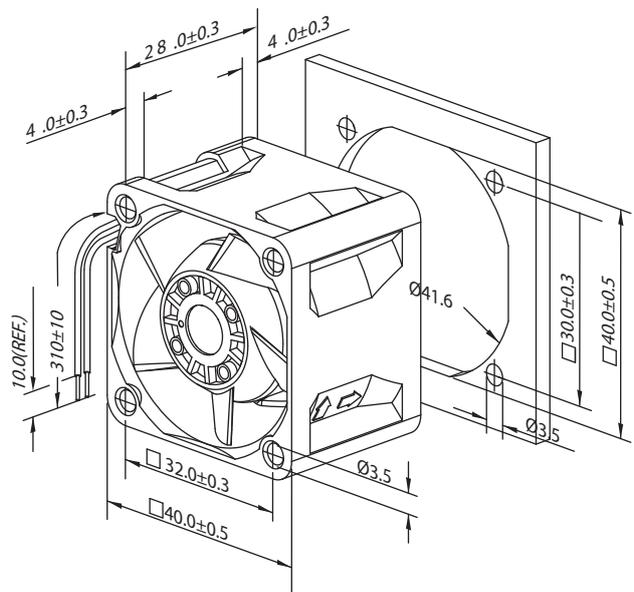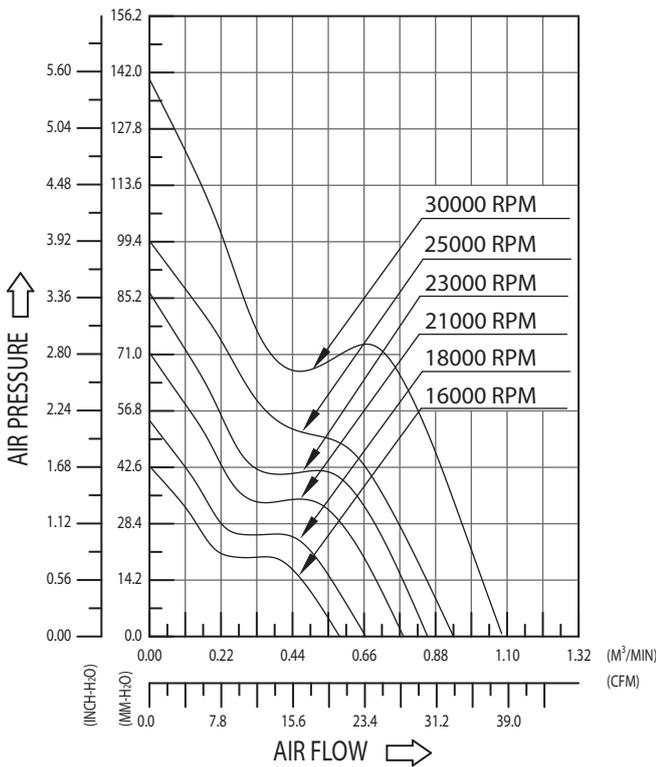



DC AXIAL FANS

DBPN SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #22 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight:

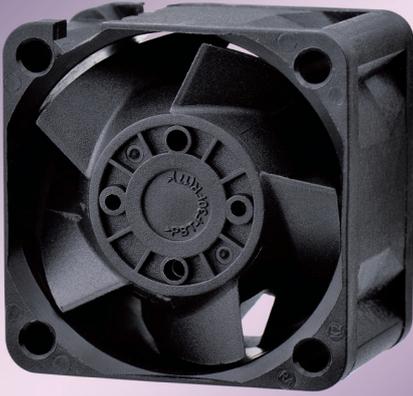

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPN0428_2U	-FG / RD	B	12	7.0 to 13.2	1.50	18.0	25000	0.892	31.51	107.02	4.213	65.6	70000

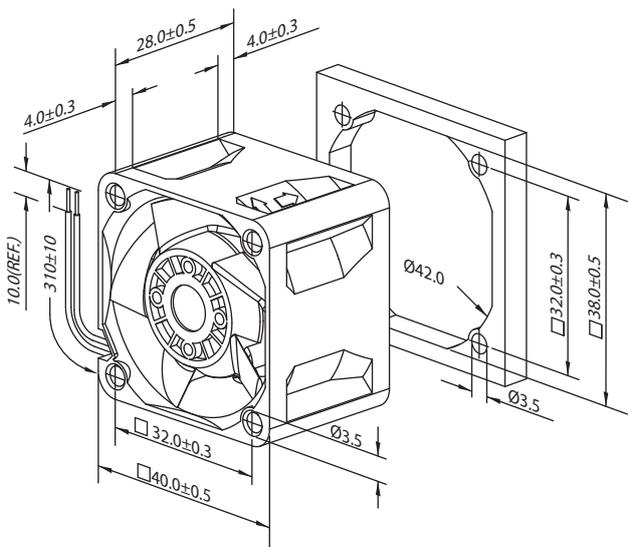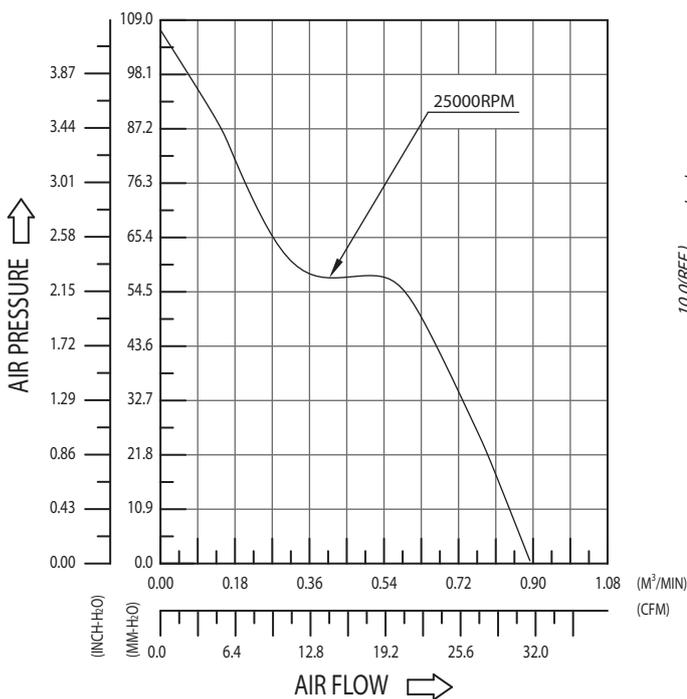



DC AXIAL FANS




DBTA SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 45g (1.58 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBTA0428_2L	-FG/RD	B	12	7.0 to 13.8	0.11	1.32	8500	0.349	12.34	10.60	0.417	38.7	120000
DBTA0428_2M	-FG/RD	B	12	7.0 to 13.8	0.13	1.56	10000	0.406	14.34	14.18	0.558	42.4	110000
DBTA0428_2H	-FG/RD	B	12	7.0 to 13.8	0.35	4.20	14500	0.586	20.68	26.33	1.037	52.9	90000
DBTA0428_2U	-FG/RD	B	12	7.0 to 13.2	0.45	5.40	16000	0.663	23.42	35.80	1.409	55.4	70000
* DBTA0428_2S	-FG/RD	B	12	7.0 to 13.2	0.62	7.44	18000	0.754	26.64	44.52	1.753	58.0	70000

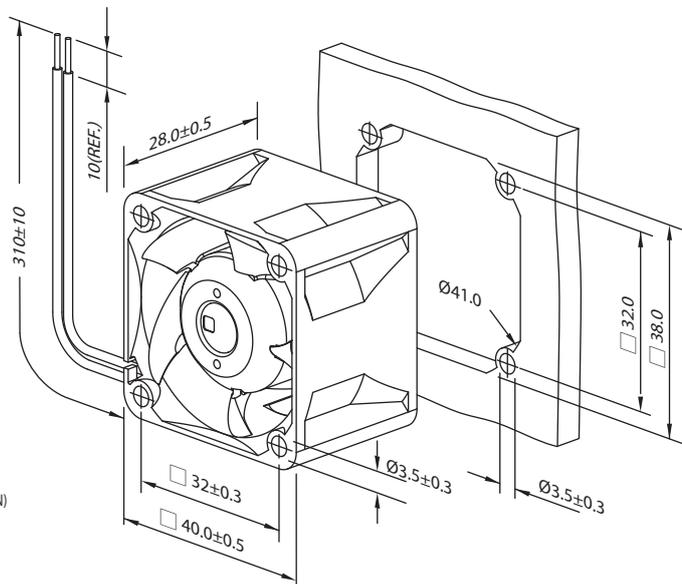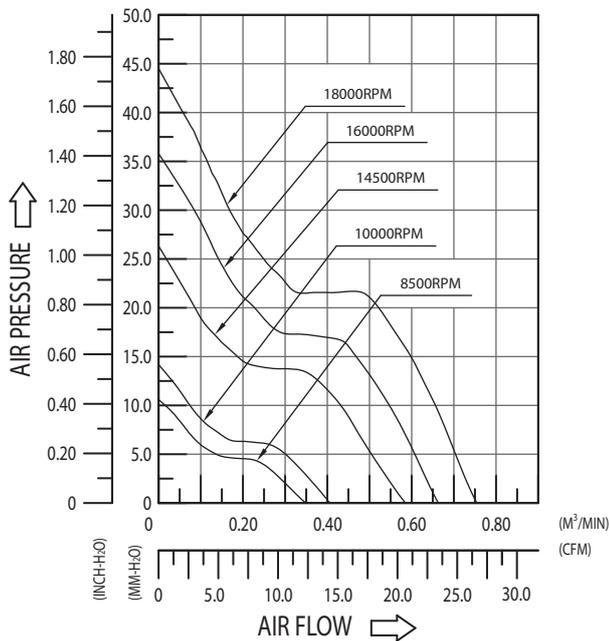



DC AXIAL FANS

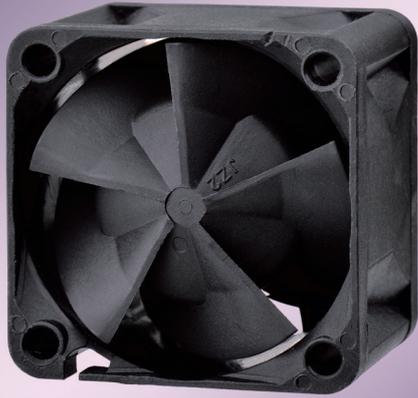

DBTB SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 45g (1.59 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DBTB0428_2M	-FG / RD	B	12	7.0 to 13.2	0.18	2.16	12000	0.378	13.36	27.08	1.066	44.22	70000	
DBTB0428_2H	-FG / RD	B	12	7.0 to 13.2	0.32	3.84	15000	0.480	16.95	34.65	1.364	49.07	70000	
DBTB0428_2U	-FG / RD	B	12	7.0 to 13.2	0.40	4.80	17000	0.537	18.97	42.72	1.682	51.82	70000	
DBTB0428_2S	-FG / RD	B	12	7.0 to 13.2	0.43	5.16	19000	0.610	21.53	49.47	1.948	54.23	70000	
DBTB0428_2F	-FG / RD	B	12	7.0 to 13.2	0.60	7.20	20500	0.664	23.43	56.71	2.233	55.85	70000	
DBTB0428_2G	-FG / RD	B	12	7.0 to 13.2	0.85	4.92	24000	0.778	27.46	64.97	2.558	59.28	70000	

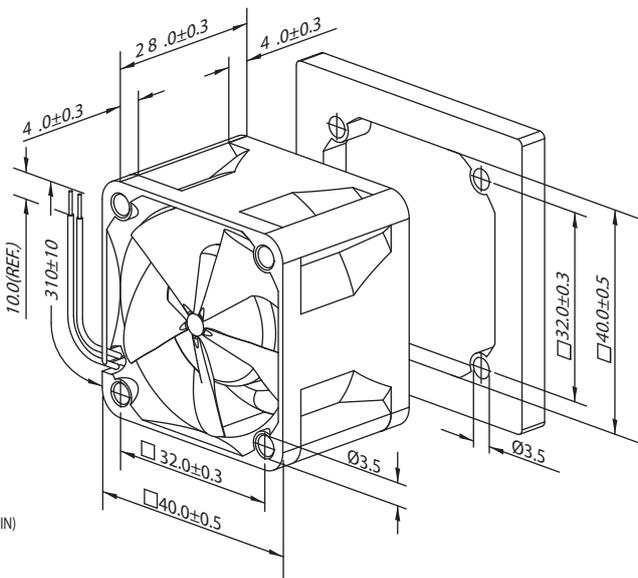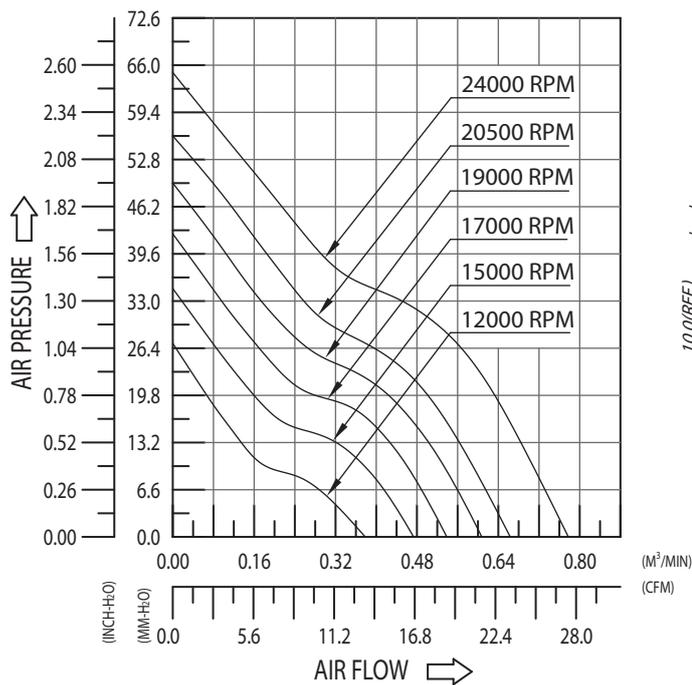



DC AXIAL FANS



DBTD SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 42g (1.05 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DBTD0428_2H	-FG / RD	B	12	7.0 to 13.2	0.35	4.20	15000	0.577	20.41	40.19	1.582	54.5	70000	
DBTD0428_2U	-FG / RD	B	12	7.0 to 13.2	0.45	5.40	17000	0.652	23.04	45.84	0.549	56.8	70000	
DBTD0428_2S	-FG / RD	B	12	7.0 to 13.2	0.70	8.40	19000	0.734	25.92	55.95	1.805	59.0	70000	
DBTD0428_2F	-FG / RD	B	12	7.0 to 13.2	0.90	10.8	21000	0.813	28.73	67.36	2.652	61.3	70000	
DBTD0428_2G	-FG / RD	B	12	7.0 to 13.2	1.00	12.0	23000	0.885	31.27	74.76	2.943	63.5	70000	

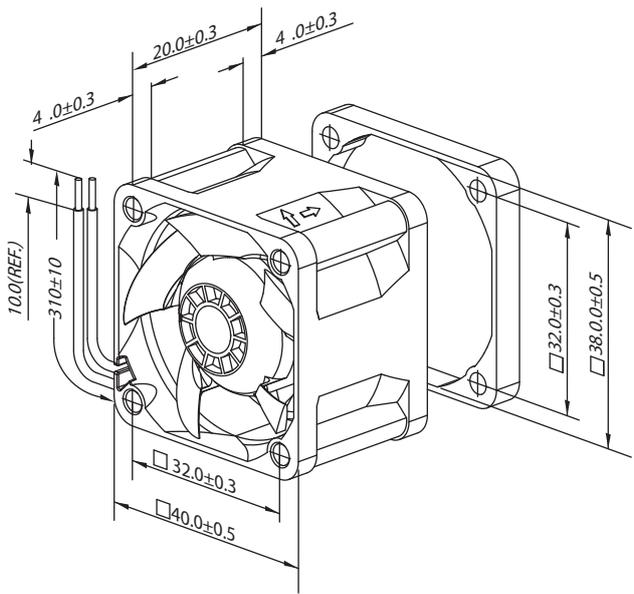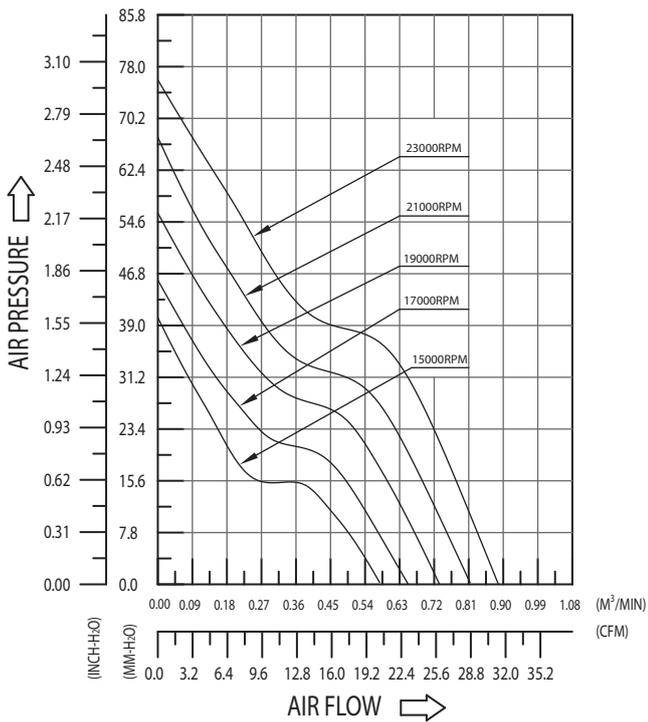

DC AXIAL FANS



DV SERIES 40×40×28 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 40g (1.41 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DV04028_12E	-FG / RD	B	12	7.0 to 13.2	0.10	1.20	8000	0.261	9.20	9.30	0.366	31.3	120000	
DV04028_12L	-FG / RD	B	12	7.0 to 13.2	0.15	1.80	10000	0.340	12.00	14.60	0.575	36.5	120000	
DV04028_12M	-FG / RD	B	12	7.0 to 13.2	0.20	2.40	12000	0.408	14.40	20.31	0.800	41.3	120000	
DV04028_12H	-FG / RD	B	12	7.0 to 13.2	0.30	3.60	14000	0.481	17.00	27.60	1.087	45.4	110000	
* DV04028_12U	-FG / RD	B	12	7.0 to 13.2	0.46	5.52	16500	0.581	20.50	37.30	1.469	48.8	100000	

