




DC AXIAL FANS

DBPD SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 67g (2.36 OZ)

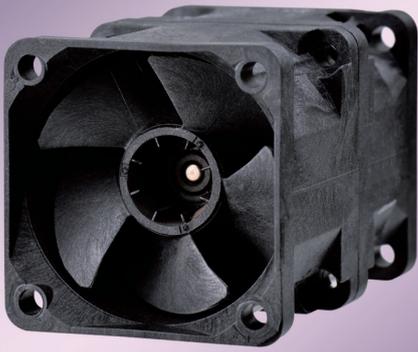

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPD0456_2U	-FG / RD	B	12	10.8 to 13.2	0.95	11.4	24500	0.710	25.07	109.63	4.316	63.5	70000

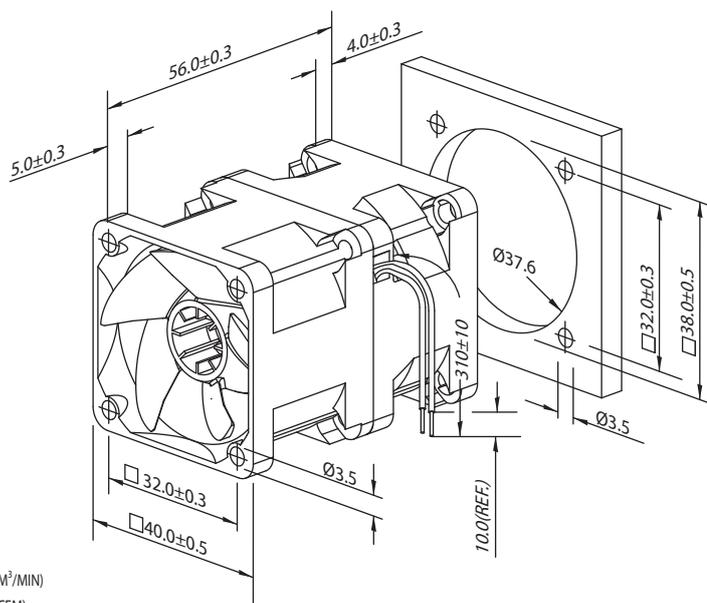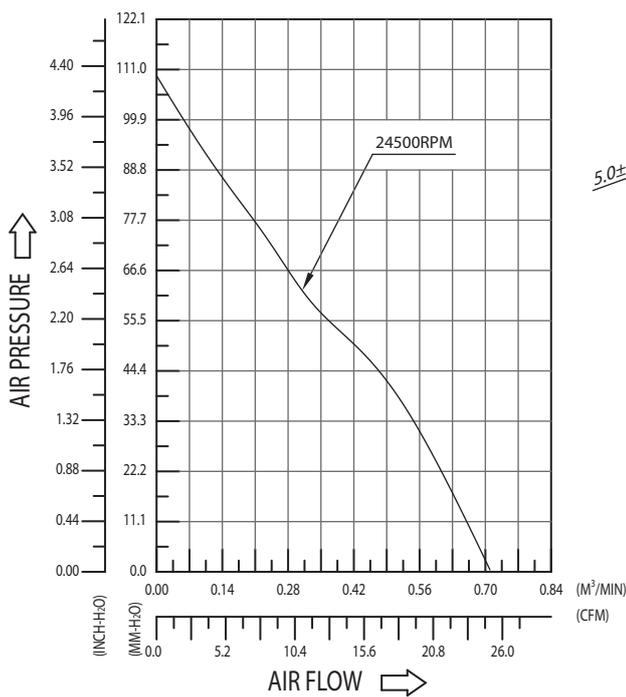



DC AXIAL FANS



DFPA SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 / 4 Blades
- * Rotational direction CCW view from front face
- * Weight: 101g (3.56 OZ)


MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPA0456_2H	-FG / RD	B	12	10.8 to 13.2	0.9	10.80	19800/20000	0.605	21.4	107.27	4.223	69.0	70000

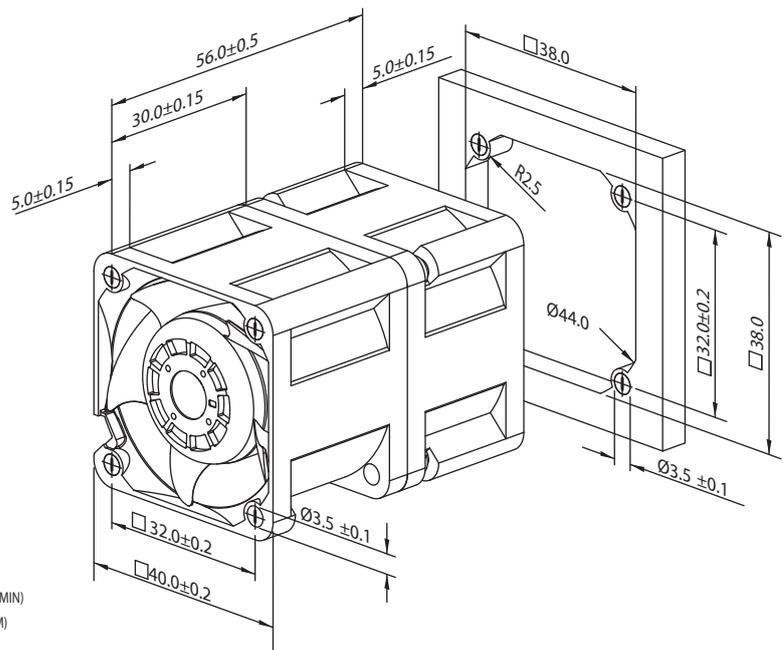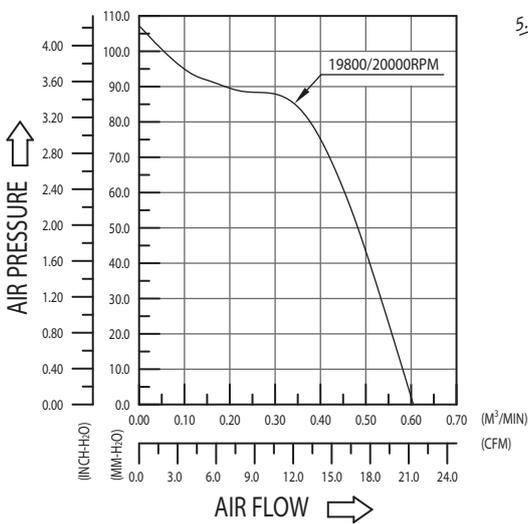



DC AXIAL FANS

DFPD SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 102g (3.60 OZ)

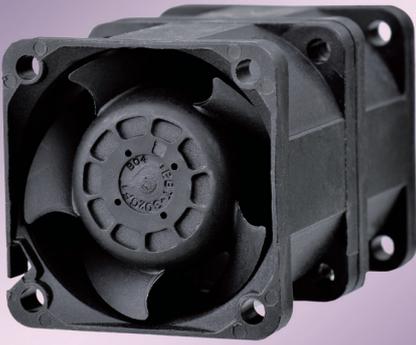

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPD0456_2U	-FG / RD	B	12	10.8 to 13.2	2.30	27.6	22500/19500	1.02	36.02	100.48	3.956	69.8	70000

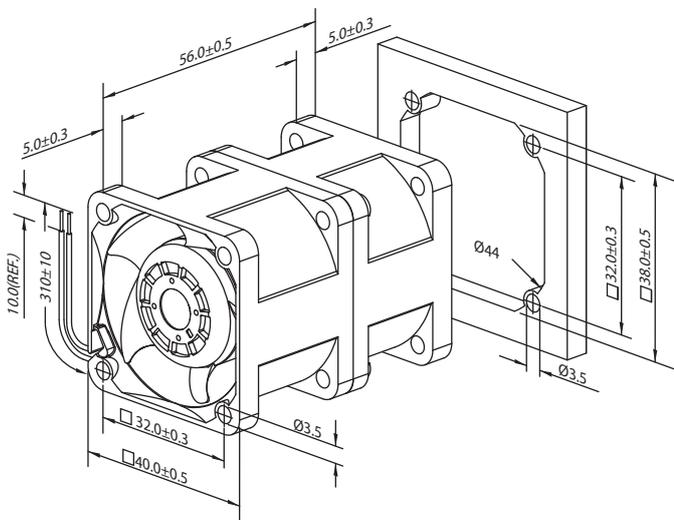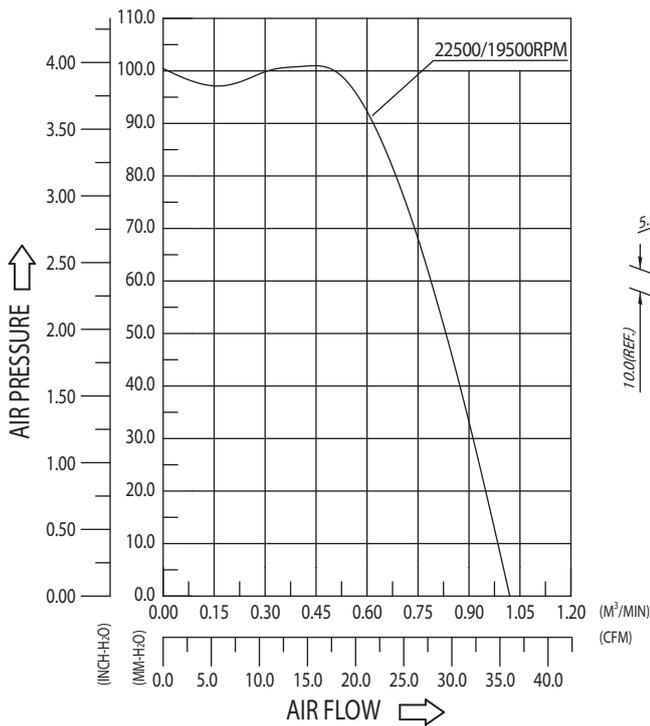



DC AXIAL FANS

DFPG SERIES 40×40×56 mm




- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL1061 #28
- * Impeller: 5 Blades/4 Blades
- * Rotational direction CCW view from front face
- * Weight: 102g (3.60 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPG0456_2U	-FG / RD	B	12	10.8 to 13.2	1.10	13.20	22700/22200	0.767	27.10	109.96	4.329	70.0	70000

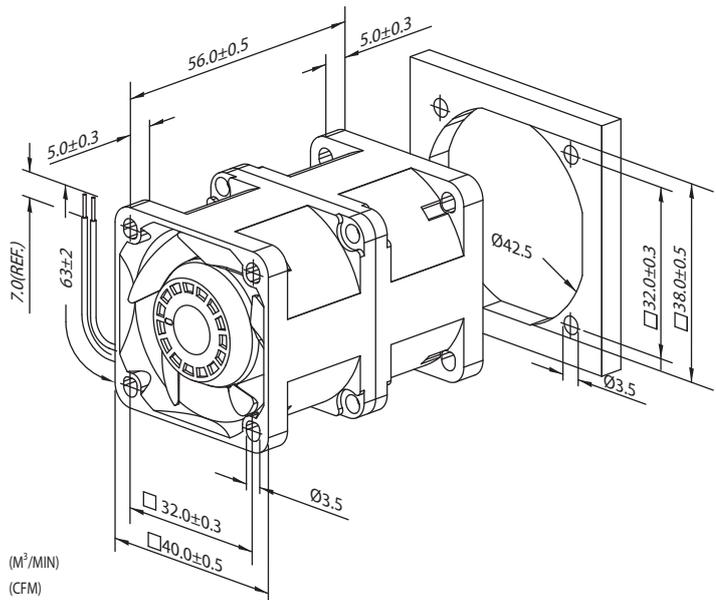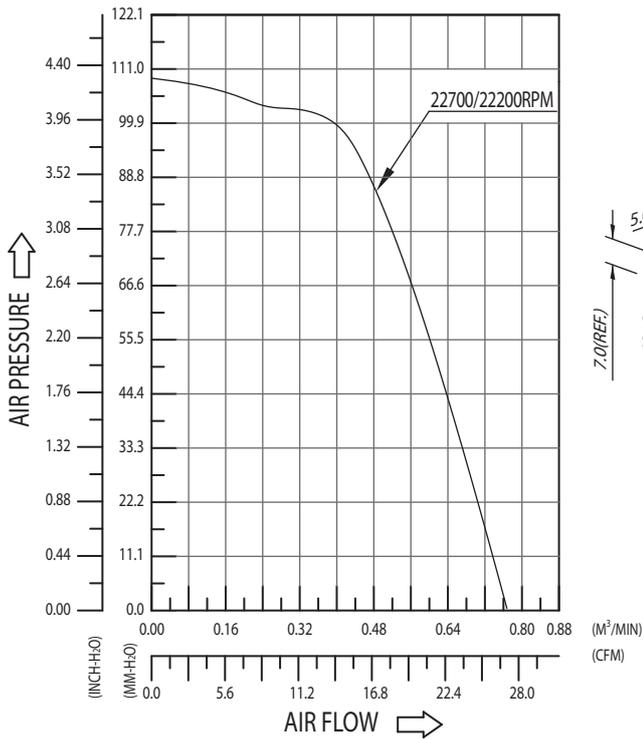



DC AXIAL FANS

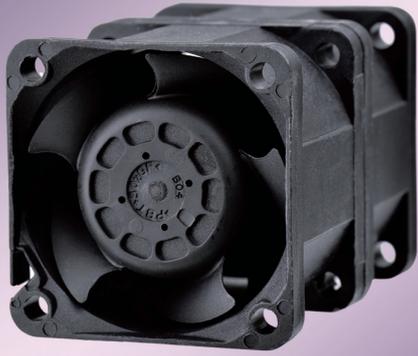

DFPH SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 or Equivalent
- * Impeller: 5 Blades inlet , 4 Blades outlet
- * Rotational direction CCW view from front face
- * Weight: 96g (3.39 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPH0456_2U	-FG / RD	B	12	7.0 to 13.2	2.30	27.60	22500/19500	0.721	25.45	76.50	3.012	56.2	70000

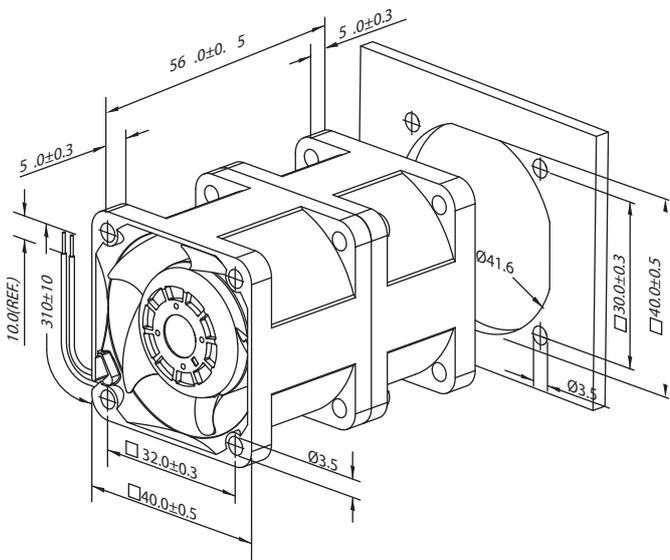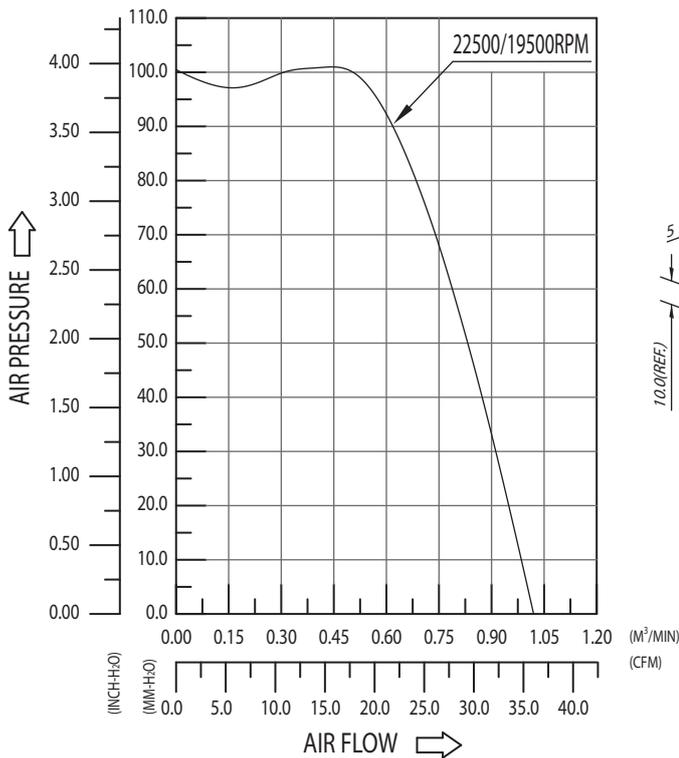



DC AXIAL FANS



DFPJ SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #26 #28
- * Impeller: 5 & 4 Blades
- * Rotational direction CCW view from front face
- * Weight: 100g (3.527 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPJ0456_2U	-FG / RD	B	12	10.8 to 13.2	1.08	10.80	21350/21000	0.619	23.01	105.95	4.171	64.5	70000
DFPJ0456_2S	-FG / RD	B	12	10.8 to 13.2	1.95	19.44	26000/26000	0.806	28.47	158.42	6.237	69.9	70000

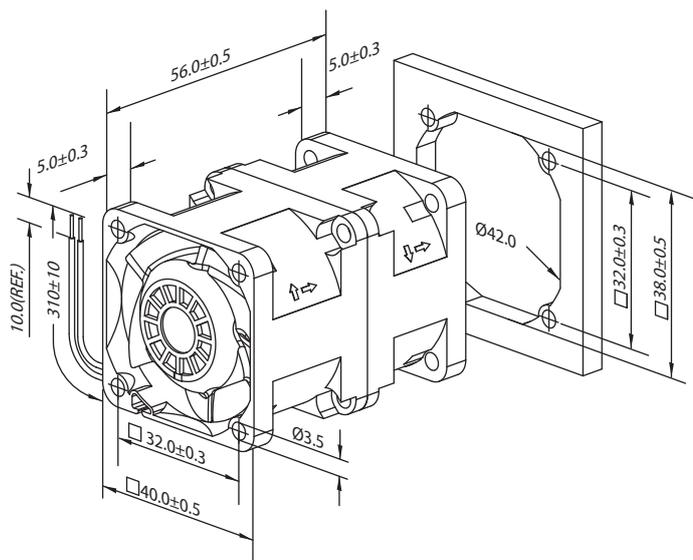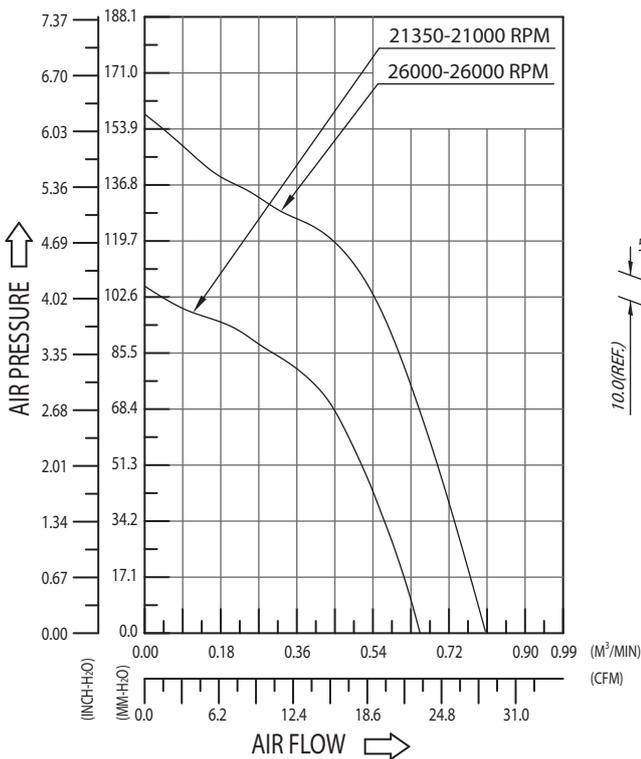



DC AXIAL FANS

DFPK SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5/4 Blades
- * Rotational direction CCW view from front face
- * Weight: 96g (3.39 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPK0456_25	-FG / RD	B	12	10.8 to 13.2	1.30	15.60	24200/22000	0.804	28.40	130.59	5.14	75.7	70000

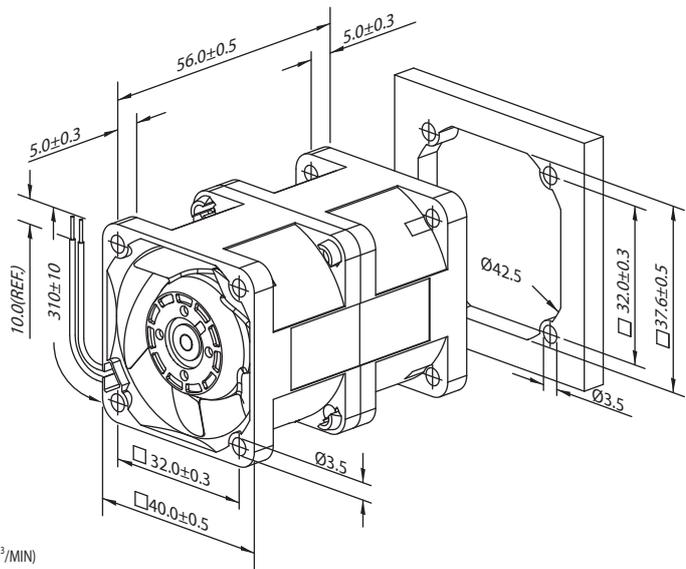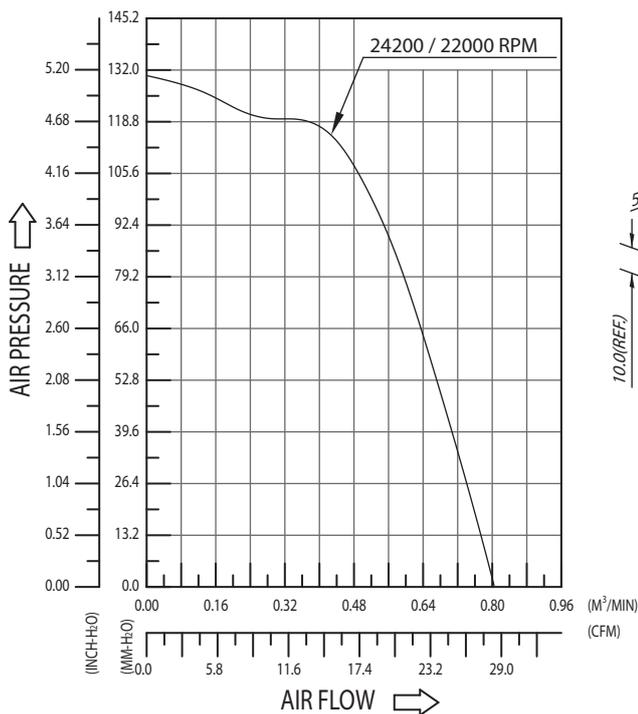

DC AXIAL FANS



DFTA SERIES 40×40×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #28 or Equivalent
- * Impeller: 5 Blades inlet, 3 Blades outlet
- * Rotational direction CCW view from front face
- * Weight: 96g (3.39 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFTA0456_2M	-FG / RD	B	12	7.0 to 13.2	0.8	9.6	16500	0.738	26.06	61.74	2.43	63.5	70000
DFTA0456_2H	-FG / RD	B	12	7.0 to 13.2	1.0	12.0	17100	0.793	28.00	68.33	2.69	64.0	70000
* DFTA0456_2U	-FG / RD	B	12	7.0 to 13.2	1.3	15.6	18000	0.812	28.68	71.91	2.83	64.5	70000

