



# DC AXIAL FANS



## DAPA SERIES 60×60×25 mm 12v, 48v

- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL 1007 AWG #26 or Equivalent
- \* Impeller: 5 Blades
- \* Rotational direction CCW view from front face
- \* Weight: 80g (2.82 OZ)

MODEL	Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L <sub>10</sub> @40°C			
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours
DAPA0625_2L	-FG / RD	B	12	7.0 to 13.2	0.09	1.08	4000	0.46	16.21	3.25	0.128	32.9	70000
DAPA0625_2M	-FG / RD	B	12	7.0 to 13.2	0.16	1.92	6000	0.69	24.32	7.28	0.287	40.0	70000
DAPA0625_2H	-FG / RD	B	12	7.0 to 13.2	0.26	3.12	8000	0.92	32.42	12.95	0.510	47.1	70000
DAPA0625_2U	-FG / RD	B	12	7.0 to 13.2	0.44	5.28	10000	1.15	40.53	20.23	0.796	52.0	70000
DAPA0625_2S	-FG / RD	B	12	7.0 to 13.2	0.63	7.56	12000	1.44	48.77	29.00	1.140	55.9	70000
DAPA0625_8L	-FG / RD	B	48	36.0 to 72.0	0.04	1.92	4000	0.46	16.21	3.25	0.128	32.9	70000
DAPA0625_8M	-FG / RD	B	48	36.0 to 72.0	0.05	2.40	6000	0.69	24.32	7.28	0.287	40.0	70000
DAPA0625_8H	-FG / RD	B	48	36.0 to 72.0	0.07	3.36	8000	0.92	32.42	12.95	0.510	47.1	70000
DAPA0625_8U	-FG / RD	B	48	36.0 to 72.0	0.12	5.76	10000	1.15	40.53	20.23	0.796	52.0	70000
DAPA0625_8S	-FG / RD	B	48	36.0 to 72.0	0.16	7.56	12000	1.44	48.77	29.00	1.140	55.9	70000

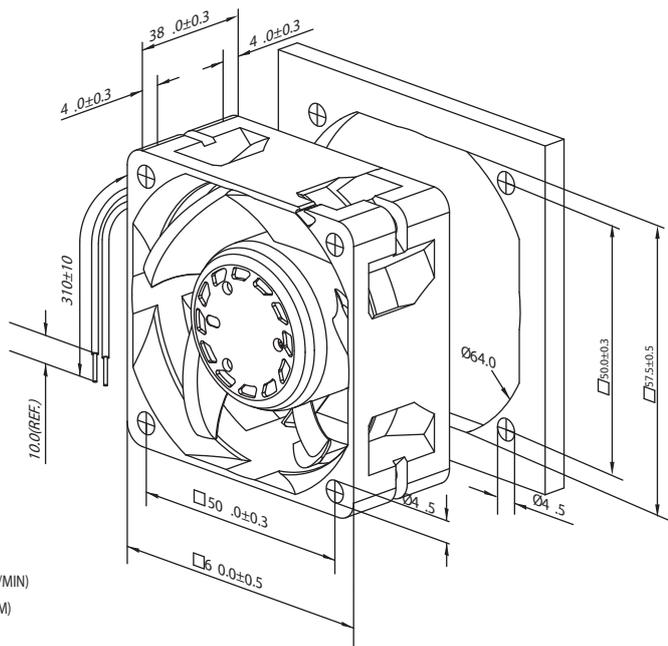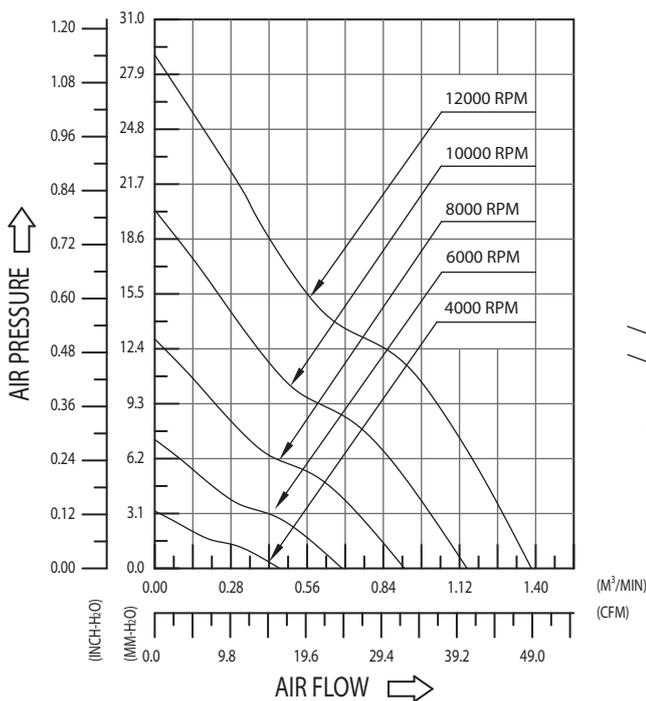



# DC AXIAL FANS



## DATB SERIES 60×60×25 mm

- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL 1007 AWG #28 or Equivalent
- \* Impeller: 7 Blades
- \* Rotational direction CCW view from front face
- \* Weight: 80.0g (2.82 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L <sub>10</sub> @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours
DATB0625_2E	-FG / RD	B	12	7 to 13.2	0.11	1.32	4200	0.659	23.29	5.23	0.206	34.2	150000
DATB0625_2L	-FG / RD	B	12	7 to 13.2	0.15	1.80	5000	0.785	27.73	7.42	0.292	38.3	140000
DATB0625_2M	-FG / RD	B	12	7 to 13.2	0.22	0.64	6000	0.954	33.68	10.46	0.412	42.6	140000
DATB0625_2H	-FG / RD	B	12	7 to 13.2	0.33	3.96	6800	1.104	38.98	13.20	0.520	46.2	105000
DATB0625_2U	-FG / RD	B	12	7 to 13.2	0.45	5.40	7400	1.203	42.49	16.00	0.63	48.9	105000
DATB0625_2S	-FG / RD	B	12	7 to 13.2	0.54	6.48	8200	1.324	46.76	19.40	0.764	50.6	70000
* DATB0625_2F	-FG / RD	B	12	7 to 13.2	0.72	8.64	9000	1.475	52.08	23.90	0.941	54.0	70000

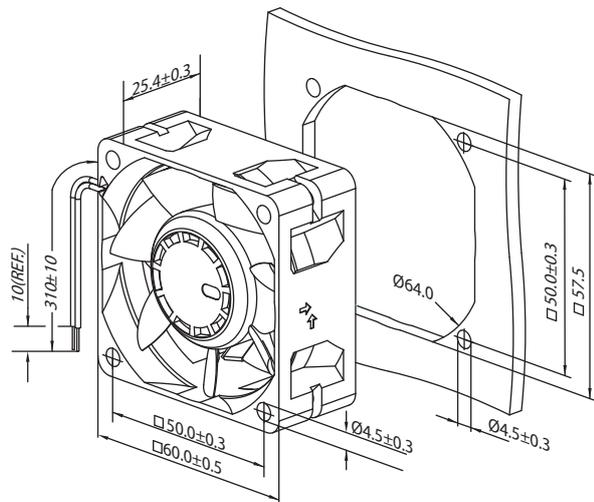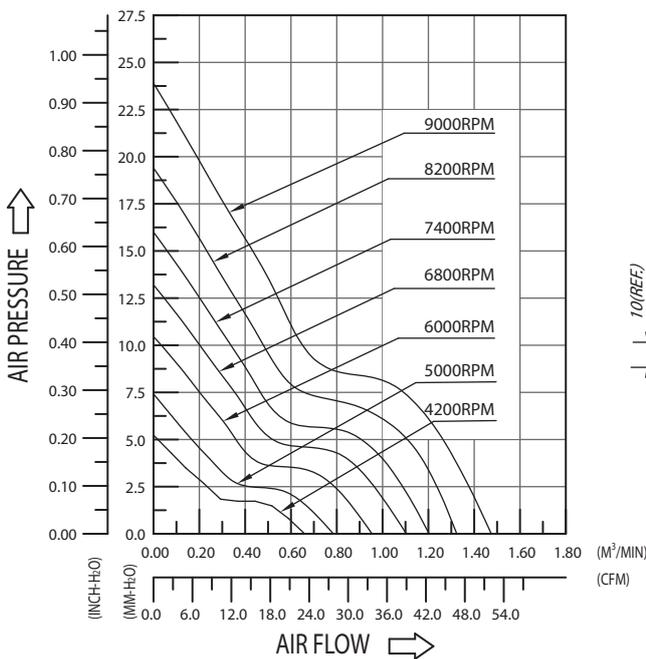



# DC AXIAL FANS



## DAZA SERIES 60×60×25 mm

- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL 1061 AWG #26 or Equivalent
- \* Impeller: 7 Blades
- \* Rotational direction CCW view from front face
- \* Weight: 53g (1.87OZ)

MODEL		Bearing Type	Rated Voltage		Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L <sub>10</sub> @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours		
DAZA0625_2U	-FG / RD	B	12	7.0 to 13.2	0.70	8.40	6800	1.039	36.71	11.52	0.453	45.0	70000		
DAZA0625_2H	-FG / RD	B	12	7.0 to 13.2	0.60	7.20	5000	0.768	27.12	6.38	0.251	37.6	70000		
DAZA0625_2M	-FG / RD	B	12	7.0 to 13.2	0.40	4.80	4000	0.616	21.77	4.08	0.161	32.0	70000		
DAZA0625_2L	-FG / RD	B	12	7.0 to 13.2	0.30	3.60	3300	0.508	17.96	2.78	0.109	22.2	70000		

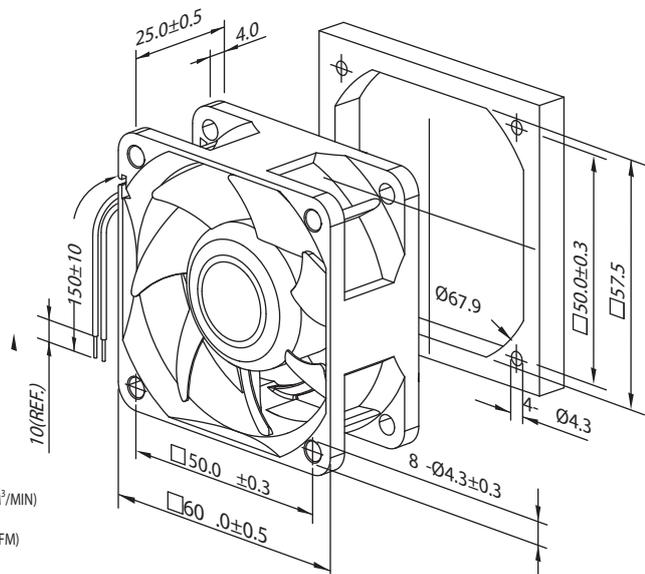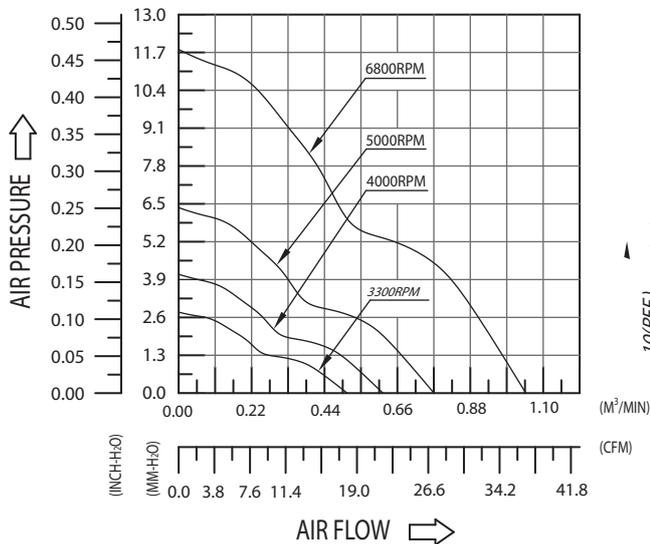

# DC AXIAL FANS



## DS SERIES 60×60×25 mm

- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL 1007 AWG #26 or Equivalent
- \* Impeller: 7 Blades
- \* Rotational direction CCW view from front face
- \* Weight: 55g (1.940 OZ)

MODEL		Bearing Type		Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L <sub>10</sub> @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours		
DS06025_12X	-FG	B B	12	7.0 to 13.2	0.10	1.20	2000	0.309	10.92	1.38	0.054	18.1	70000		
DS06025_12E	-FG	B B	12	7.0 to 13.2	0.20	2.40	2500	0.387	13.65	2.16	0.085	20.6	70000		
DS06025_12L	-FG	B B	12	7.0 to 13.2	0.30	3.60	3300	0.551	18.45	3.62	0.143	26.0	70000		
DS06025_12L	-FG	B B	12	7.0 to 13.2	0.40	4.80	4000	0.673	23.76	5.21	0.205	31.5	70000		
DS06025_12H	-FG	B B	12	7.0 to 13.2	0.60	7.20	5000	0.808	28.54	8.01	0.315	37.4	70000		
* DS06025_12U	-FG	B B	12	7.0 to 13.2	0.70	8.40	6800	1.101	38.85	12.54	0.494	45.9	70000		

