DC AXIAL FANS

DFPA SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1061 AWG #22 #26 #28
* Impeller: 7 & 5 Blades
* Rotational direction CCW view from front face
* Weight: 170g (5.996 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPA0656_2U	-FG / RD	B	12	10.8 to 13.2	2.0	23.04	12100/11300	1.806	63.80	68.54	2.698	74.2	70000
DFPA0656_2S	-FG / RD	B	12	10.8 to 13.2	2.8	33.60	13500/12500	2.027	71.60	85.37	3.361	76.0	70000

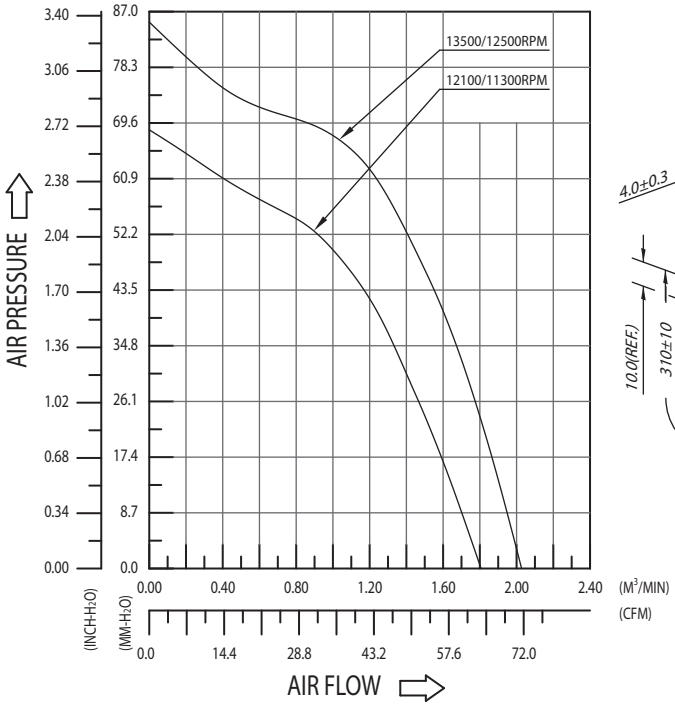

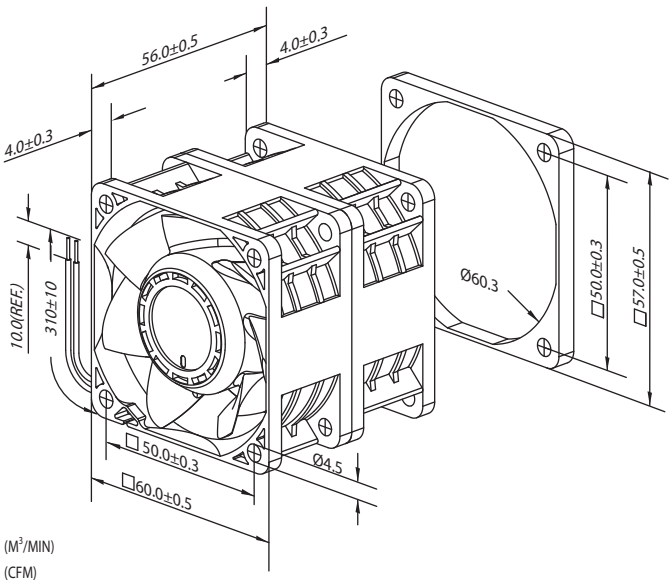

DC AXIAL FANS

DFPB SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1061 AWG #24 #28
* Impeller: 5 & 3 Blades
* Rotational direction CCW view from front face
* Weight: 170g (5.996 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPB0656_2U	-FG / RD	B	12	10.8 to 13.2	2.0	22.3	14800/15700	1.633	57.66	108.08	4.255	78.0	70000
DFPB0656_2S	-FG / RD	B	12	10.8 to 13.2	2.4	28.8	16400/17400	1.850	65.34	130.41	5.134	80.5	70000
DFPB0656_2G	-FG / RD	B	12	10.8 to 13.2	3.0	36.0	16800/15400	2.097	74.06	97.95	3.856	86.0	70000

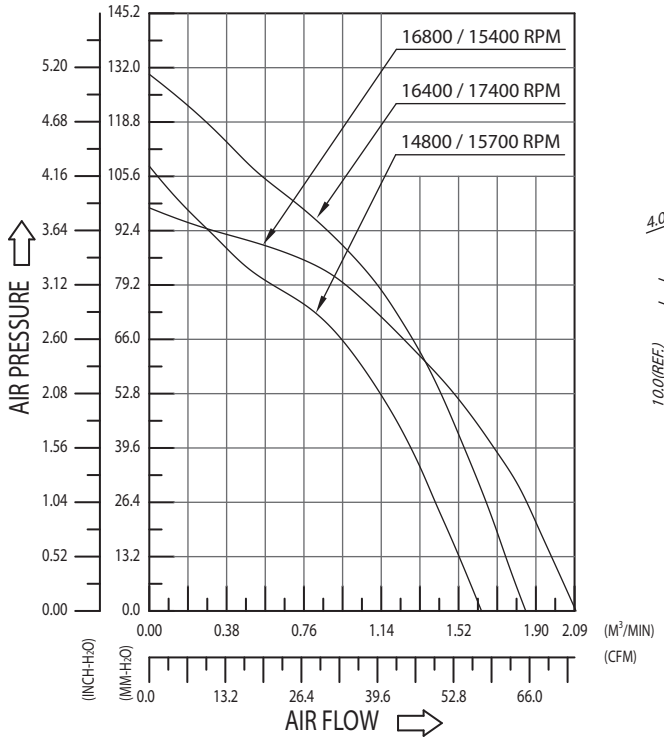

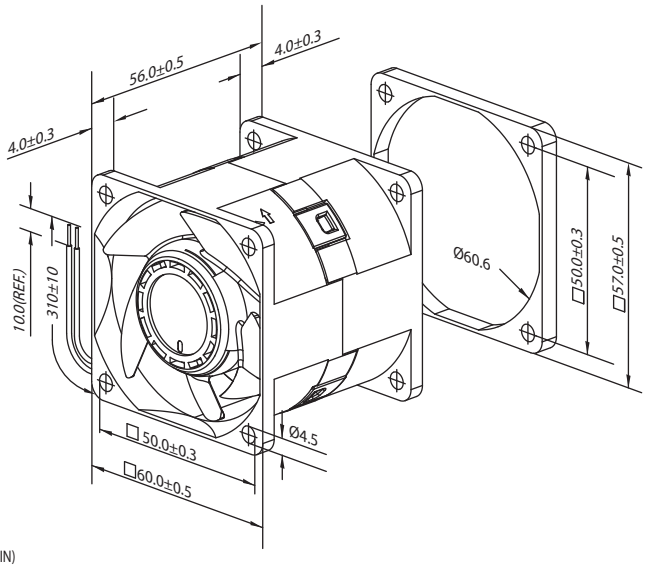

DC AXIAL FANS

DFPC SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1061 AWG #22 #26
* Impeller: 5/4 Blades
* Rotational direction CCW view from front face
* Weight: 163g (5.75 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40℃
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m^3/min	CFM	mmH2O	IN H2O	dB-A	hours
DFPC0656_2U	-FG / RD	B	12	7.0 to 13.2	2.45	29.40	17500/16500	2.146	75.78	99.47	3.916	80.0	70000
DFPC0656_2S	-FG / RD	B	12	7.0 to 13.2	3.67	44.04	20400/19500	2.324	82.08	138.25	5.443	81.0	70000

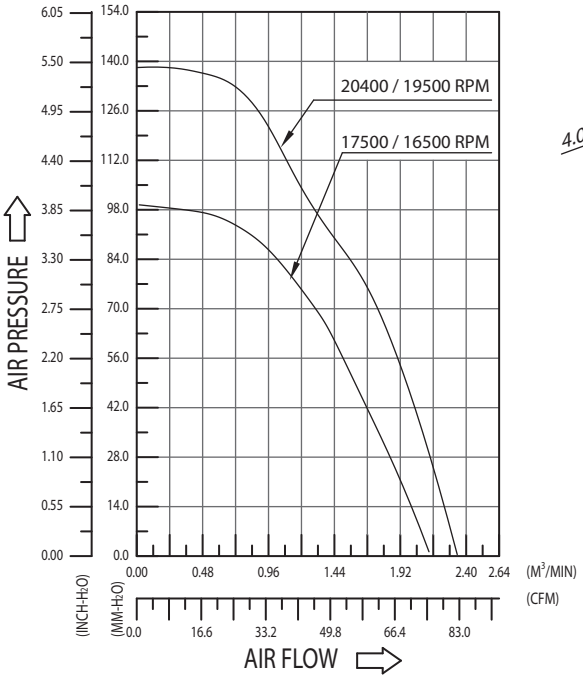

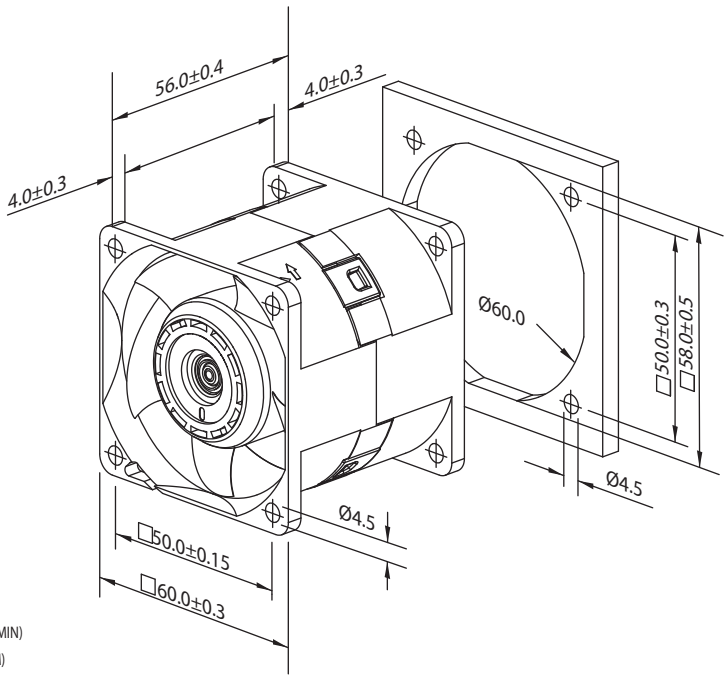

DC AXIAL FANS

DFPD SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 10368 AWG #24 #26 or Equivalent
* Impeller: 5 & 3 Blades
* Rotational direction CCW view from front face
* Weight: 172g (6.067 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPD0656_2S	-FG / RD	B	12	7.0 to 13.2	2.27	22.68	18400/17700	1.623	57.34	175.1	6.893	74	70000

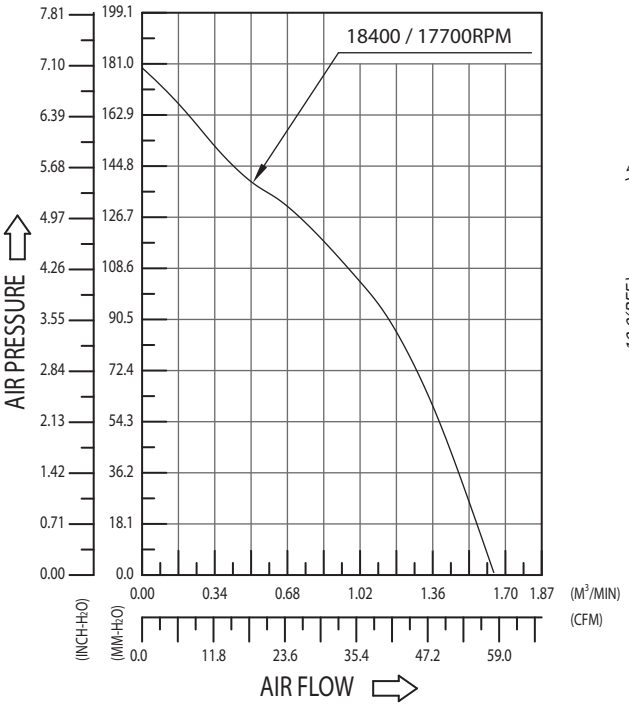

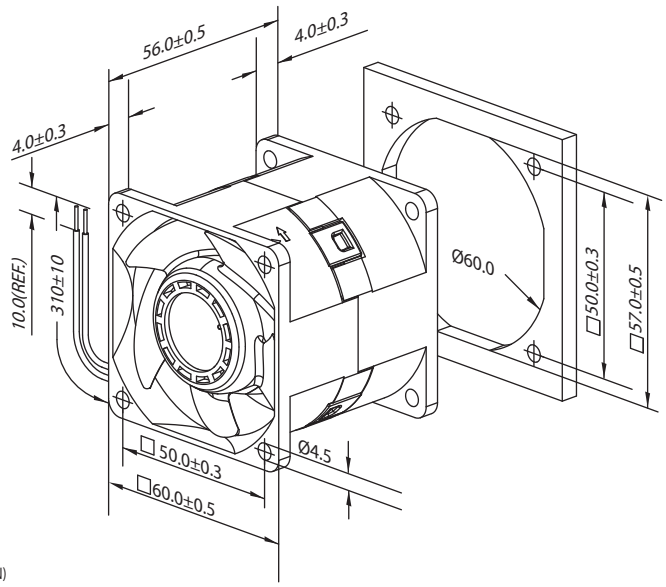

DC AXIAL FANS

DFPE SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1061 AWG #24 / AWG#28
* Impeller: 7 Blades inlet , 4 Blades outlet
* Rotational direction CCW view from front face
* Weight: 188g (6.63 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPE0656_2U	-FG / RD	B	12	10.8 to 13.2	2.7	32.4	17700/14000	2.058	72.7	117.2	4.614	76.4	70000

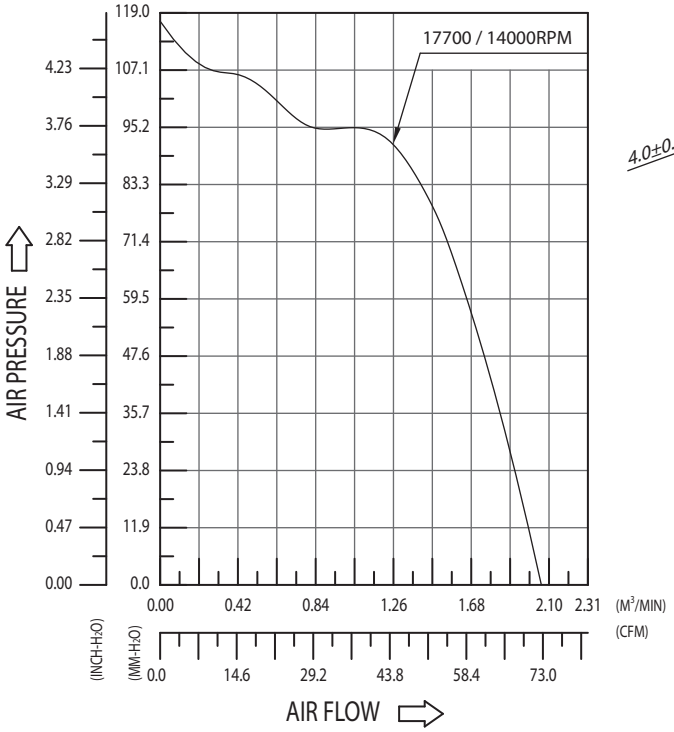

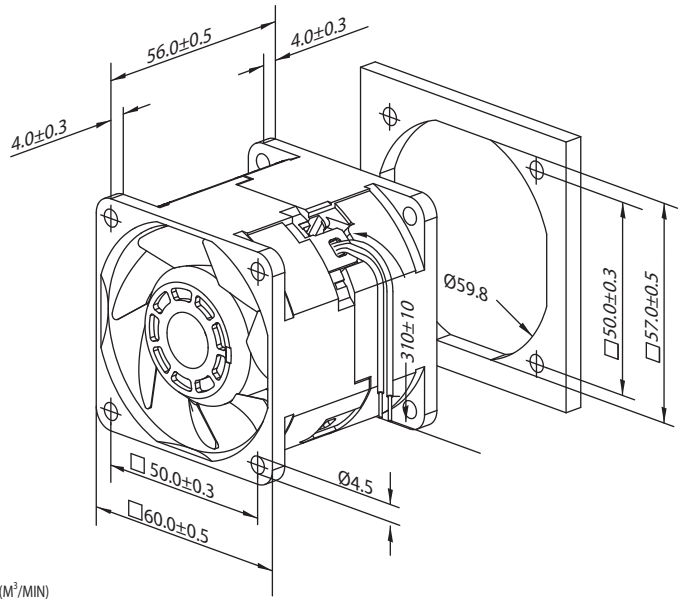

DC AXIAL FANS

DFPF SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1007 AWG #26 or Equivalent
* Impeller: 5 Blades inlet,4 Blades outlet
* Rotational direction CCW view from front face
* Weight: 160g (5.64 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPF0656_2U	-FG / RD	B	12	10.8 to 13.2	3.10	37.2	18300	2.273	80.20	115.80	4.559	73.0	70000

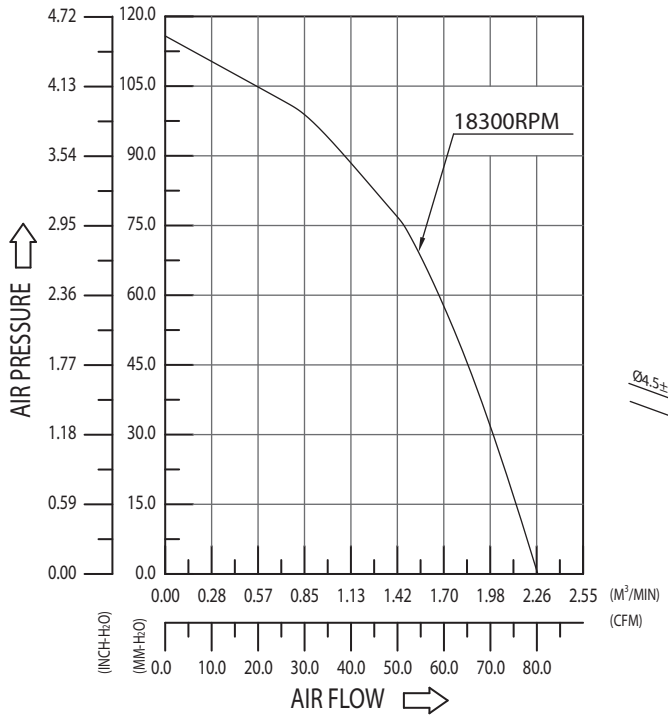

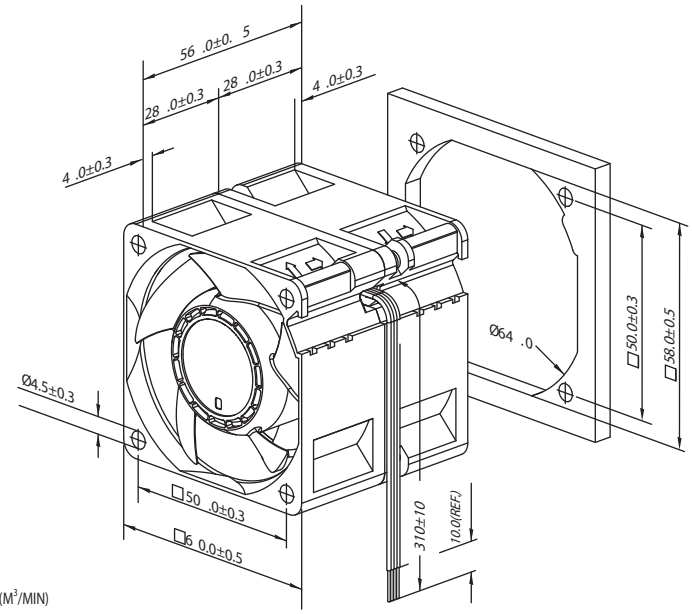

DC AXIAL FANS

DFPG SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 1007 AWG #24 or Equivalent
* Impeller: 5 Blades(Inlet) 4 Blades(Outlet)
* Rotational direction CCW view from front face
* Weight: 165g (5.82 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPG0656_2S	-FG / RD	B	12	7.0 to 13.2	3.10	37.20	18000/17000	2.279	80.47	125.40	4.937	80.0	70000

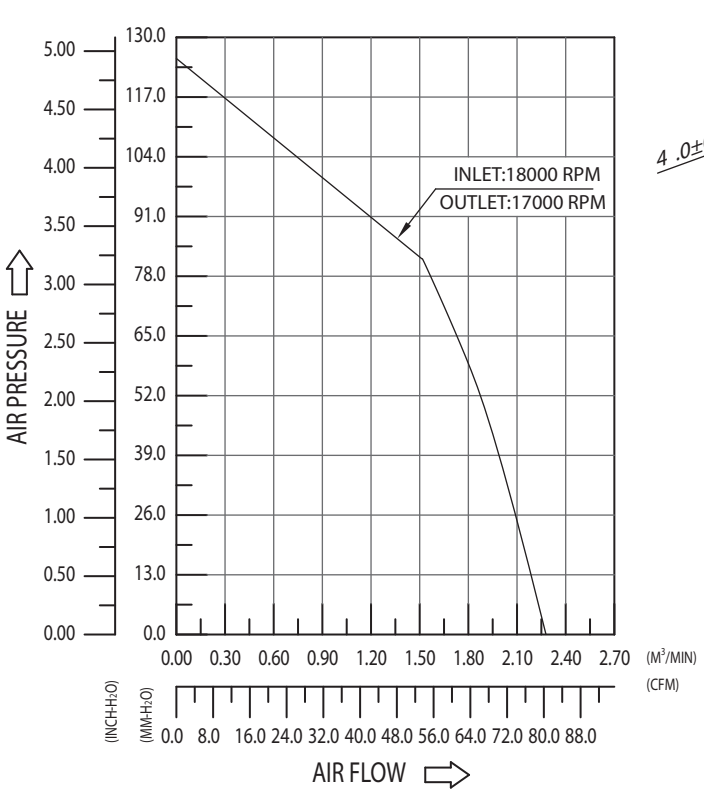

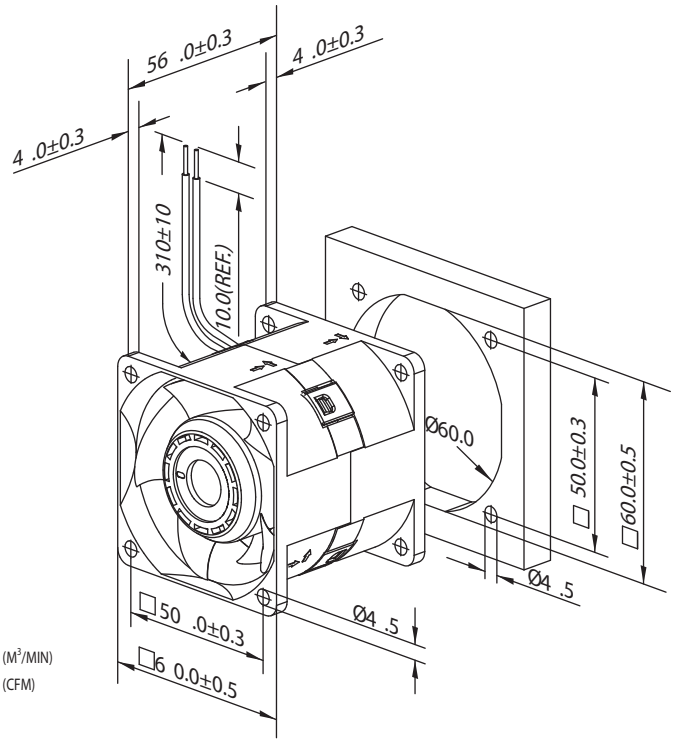

DC AXIAL FANS

DFPJ SERIES
60×60×56 mm

* Material: Impeller & Frame: Plastic (UL 94V-0)
* Lead Wires: UL 10368 AWG #24 or Equivalent
* Impeller: 5/3 Blades
* Rotational direction CCW view from front face
* Weight: 170g (6.00 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L10@40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m³/min	CFM	mmH₂O	IN H₂O	dB-A	hours
DFPJ0656_2U	-FG / RD	B	12	10.8 to 13.2	2.35	28.20	18000/18600	1.679	59.30	162.05	6.38	75.6	70000