



DC AXIAL FANS

DFPA SERIES 80×80×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 5 Blades INLET, 4 Blades OUTLET
- * Rotational direction CCW view from front face
- * Weight: 305g (10.785 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DFPA0856_2E	-FG / RD	B	12	7.0 to 15.0	0.72	8.64	5100/4400	1.553	54.9	16.0	0.629	57.0	70000	
DFPA0856_2L	-FG / RD	B	12	7.0 to 15.0	0.96	11.52	6200/5300	1.921	67.9	24.0	0.944	59.0	70000	
DFPA0856_2M	-FG / RD	B	12	7.0 to 15.0	1.22	14.64	7300/6300	2.275	80.4	33.3	1.311	64.0	70000	
DFPA0856_2H	-FG / RD	B	12	7.0 to 15.0	1.98	23.76	8400/7200	2.617	92.5	43.5	1.712	68.0	70000	
DFPA0856_2U	-FG / RD	B	12	7.0 to 15.0	2.82	33.84	9500/8200	2.965	104.8	55.4	2.181	71.5	70000	

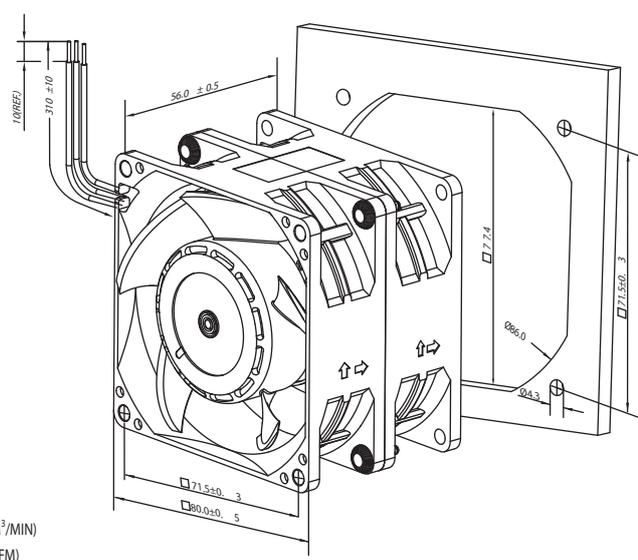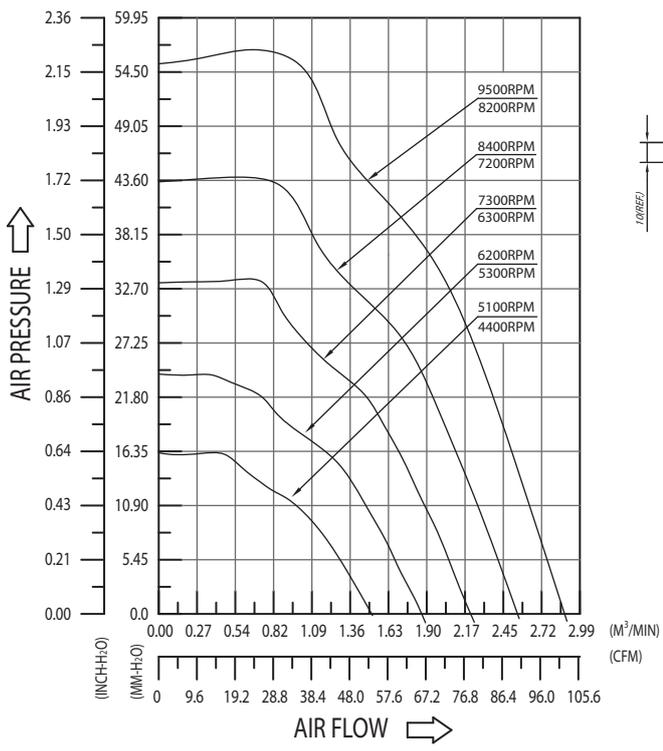



DC AXIAL FANS



DFPB SERIES 80×80×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 290g (10.23 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPB0856_2U	-FG / RD	B	12	7.0 to 13.2	1.85	22.2	10000/9200	2.466	87.05	89.54	3.525	72.0	70000

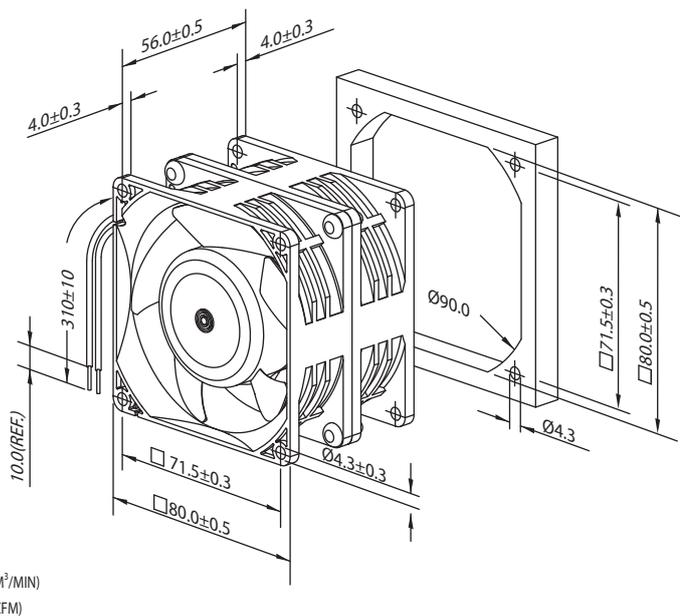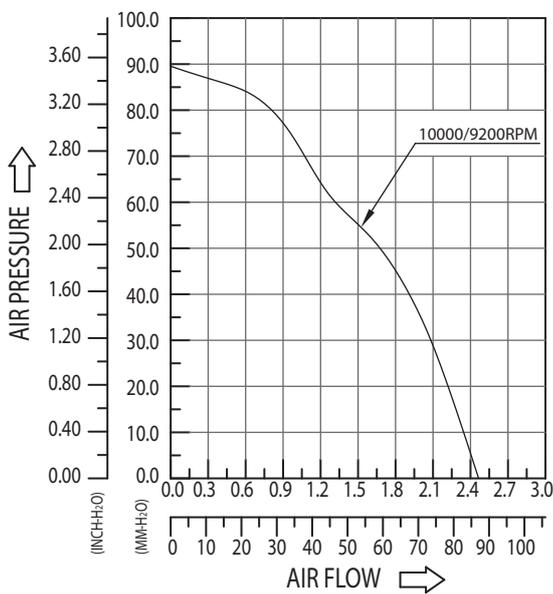

DC AXIAL FANS

DFPC SERIES 80×80×56 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 330g (11.64 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DFPC0856_2U	-FG / RD	B	12	7.0 to 13.2	2.60	31.2	13700/11400	2.665	94.12	116.14	4.572	74.5	70000

