



DC AXIAL FANS



2B SERIES 92×92×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 9 Blades
- * Rotational direction CCW view from front face
- * Weight: 270g (9.52 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
2B09238_12E	-FG/RD	B	12	7.0 to 13.2	0.22	2.64	3000	1.707	60.28	7.26	0.286	40.0	140000
2B09238_12L	-FG/RD	B	12	7.0 to 13.2	0.41	4.92	4000	2.295	81.05	12.6	0.496	47.2	140000
2B09238_12M	-FG/RD	B	12	7.0 to 13.2	0.7	8.4	5000	2.869	101.32	18.6	0.732	54.1	130000
2B09238_12H	-FG/RD	B	12	7.0 to 13.2	1.25	15.0	6000	3.496	123.46	27.8	1.095	58.6	130000
2B09238_12U	-FG/RD	B	12	7.0 to 13.2	2.0	24.0	7000	4.150	146.57	37.9	1.492	62.4	130000
* 2B09238_12S	-FG/RD	B	12	7.0 to 13.2	3.1	37.2	8000	4.654	164.34	46.8	1.843	65.8	120000

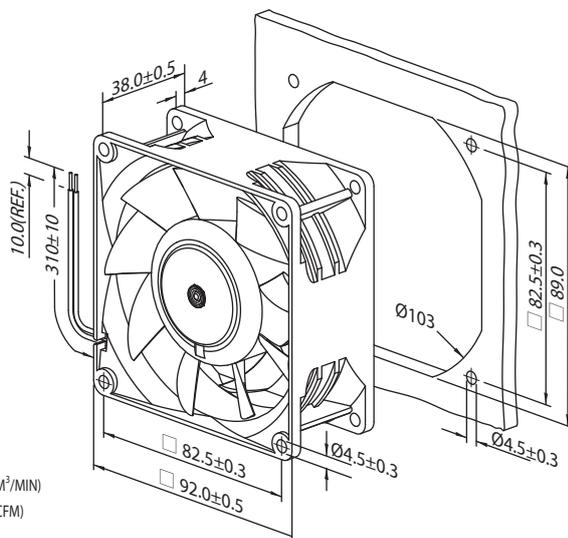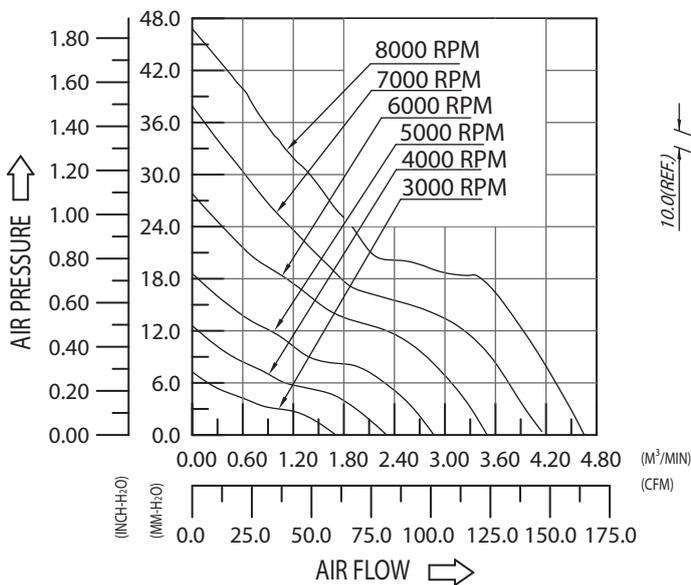



DC AXIAL FANS



DBPA SERIES 90×90×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: PVC WIRES UL 1061 AWG#24
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 252g (8.89 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPA0938_2F	-FG / RD	B	12	10.8 to 13.2	3.75	45.0	12000	5.14	181.68	70.99	2.79	70.5	70000

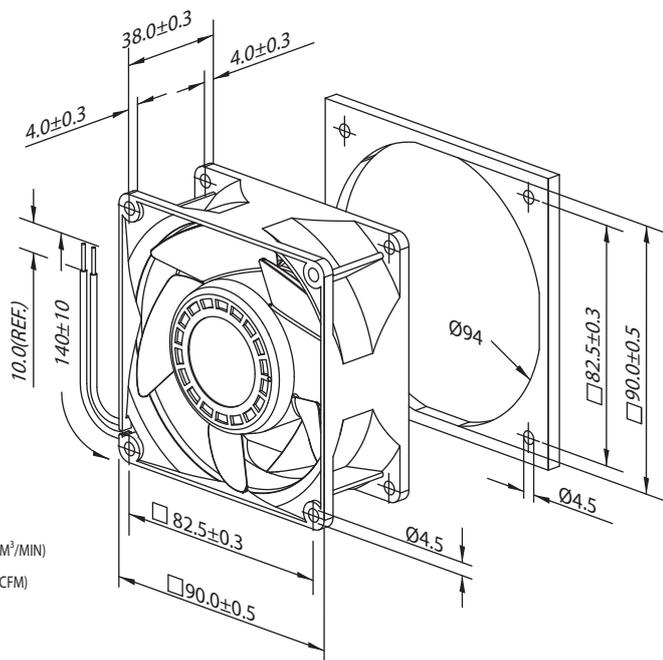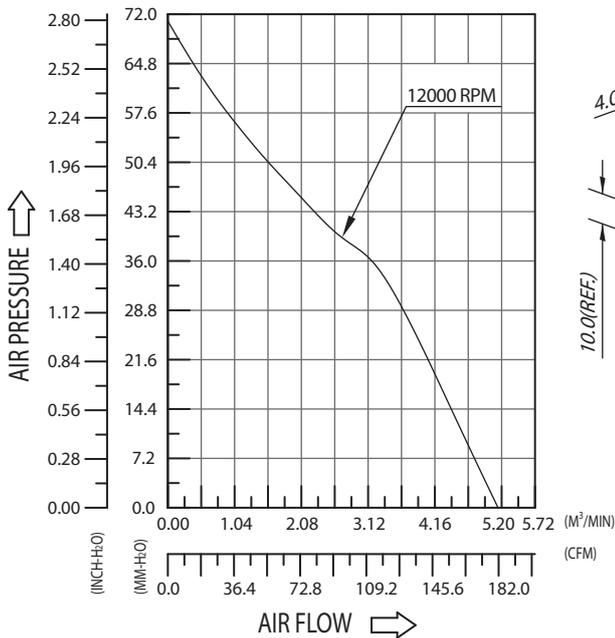



DC AXIAL FANS



DBPB SERIES 90×90×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL1430 AWG#26 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CW view from front face
- * Weight: 268g (9.453 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPB0938_8U	-FG / RD	B	48	36 to 75.0	1.10	52.80	12800	5.545	195.82	73.72	2.902	72.8	70000

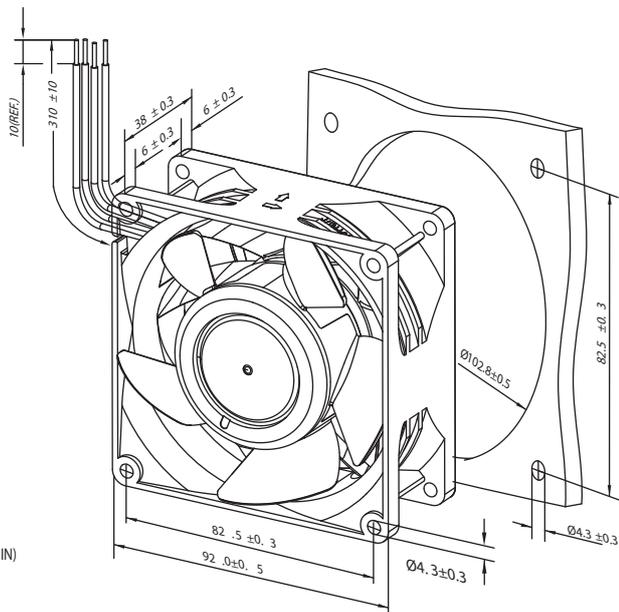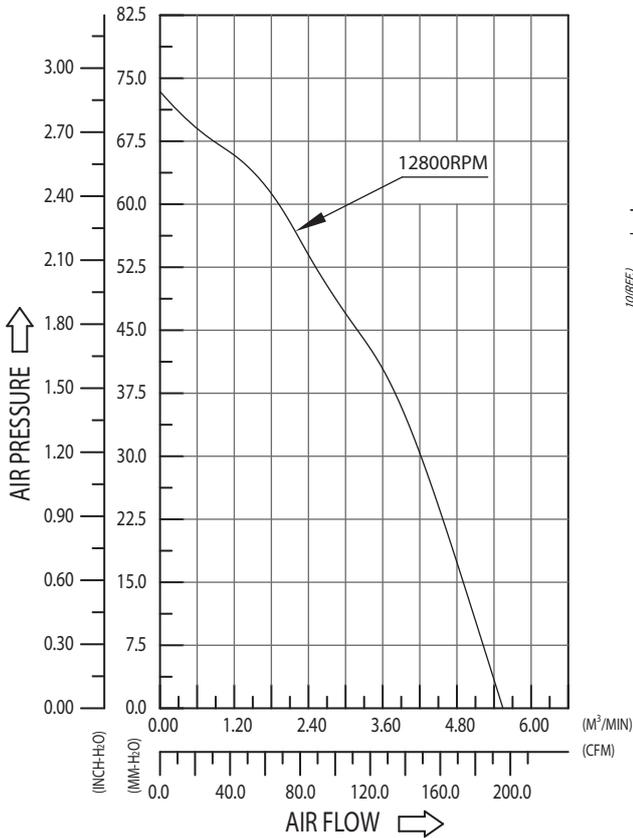



DC AXIAL FANS

DBPF SERIES 92×92×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1061 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 225 g (7.94 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPF0938_2M	-FG / RD	B	12	10.8 to 13.2	0.82	9.84	6500	3.021	106.64	28.19	1.11	56.8	70000

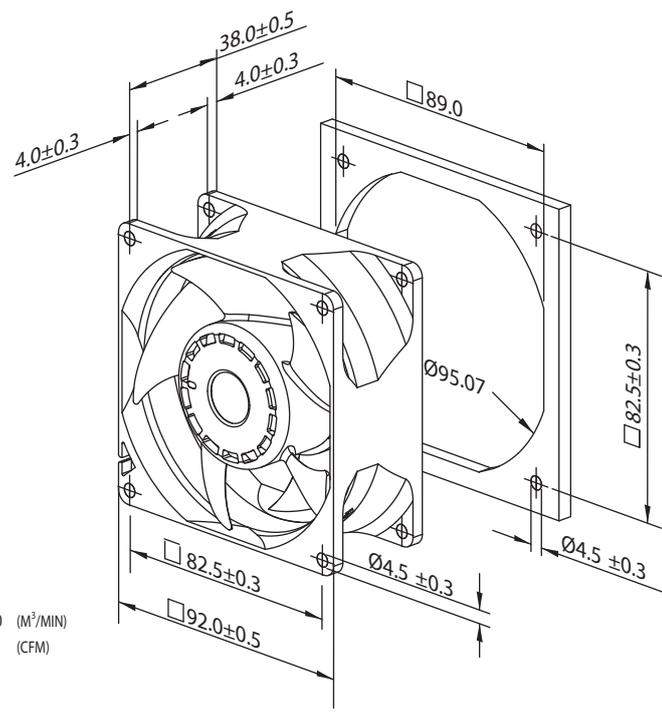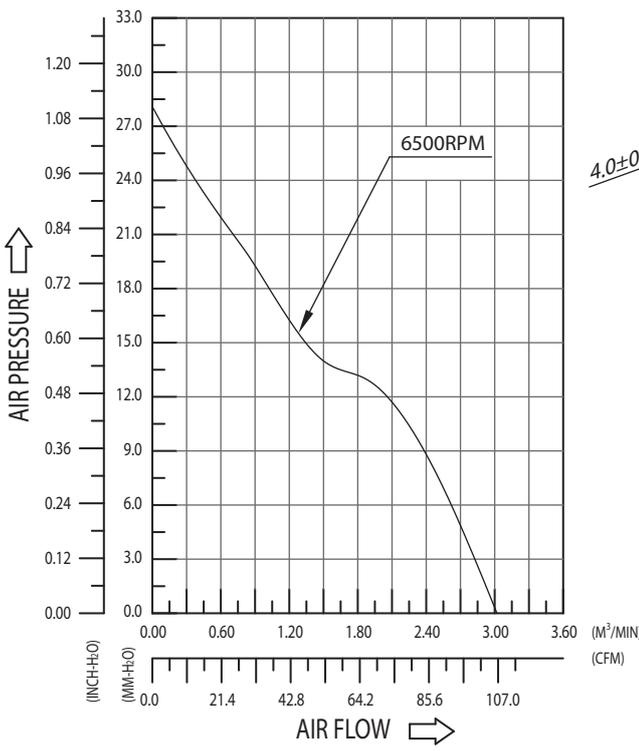



DC AXIAL FANS



DBPG SERIES 92×92×38 mm 12v,48v

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 240g (8.47 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPG0938_8H	-FG / RD	B	48	36.0 to 72.0	0.55	26.40	11000	4.201	148.04	63.70	2.508	65.0	70000
DBPG0938_8U	-FG / RD	B	48	36.0 to 72.0	0.67	32.16	12000	4.654	164.00	68.53	2.698	69.3	70000
DBPG0938_8S	-FG / RD	B	48	36.0 to 72.0	1.00	48.00	13500	5.132	181.25	84.17	3.314	71.5	70000
DBPG0938_2U	-FG / RD	B	12	10.8 to 13.8	3.00	36.00	12000	4.654	164.00	68.53	2.698	69.3	70000

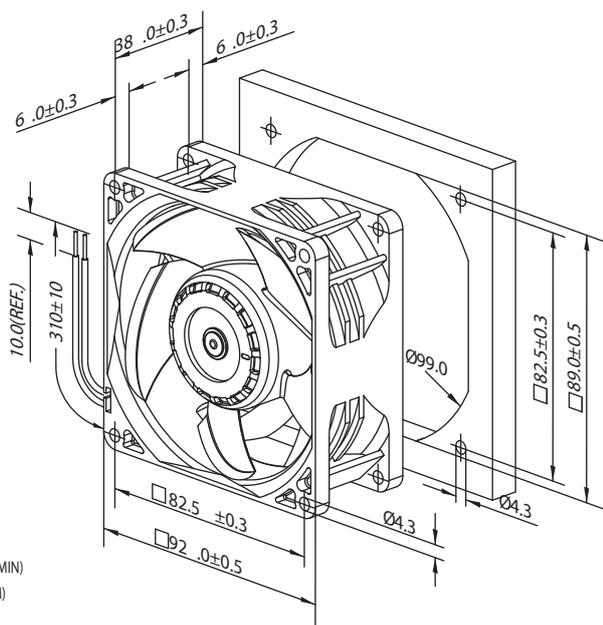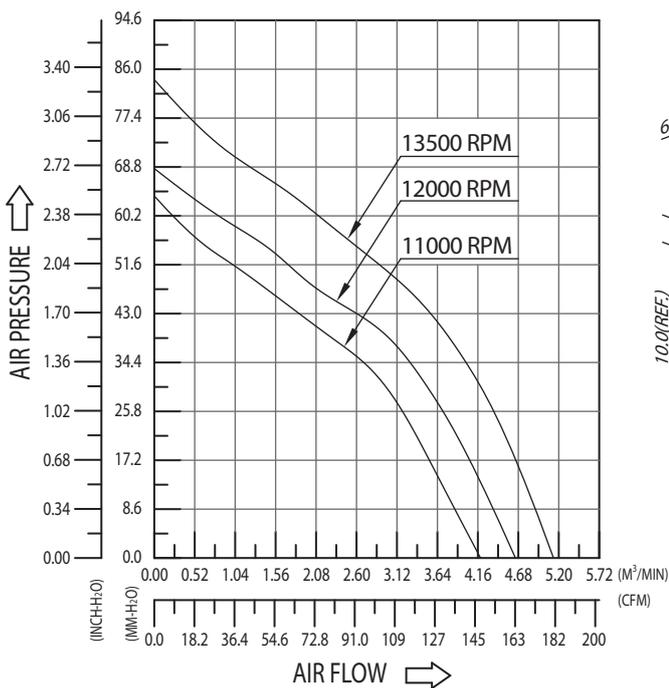





DC AXIAL FANS

DBPJ SERIES 92×92×38 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #22 or Equivalent
- * Impeller: 5 Blades
- * Rotational direction CCW view from front face
- * Weight: 256g (9.03 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L ₁₀ @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours
DBPJ0938_2U	-FG / RD	B	12	10.8 to 13.2	2.65	31.8	11500	4.689	165.07	79.93	3.15	70.0	70000

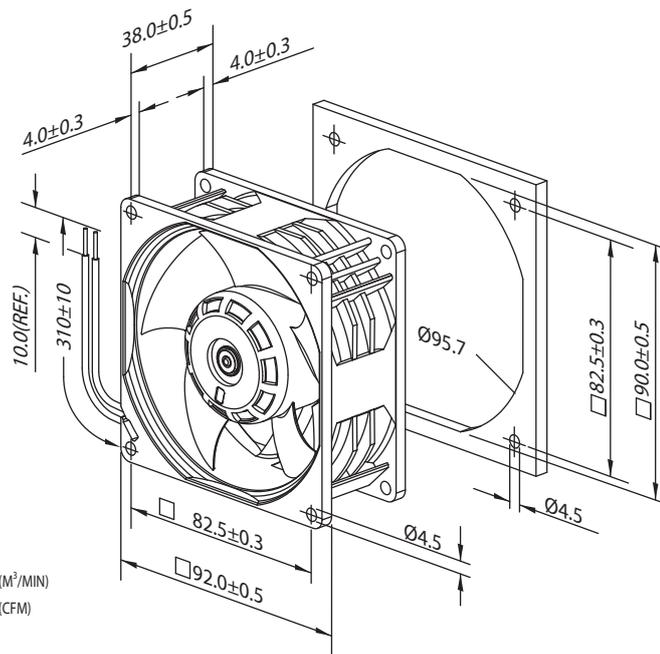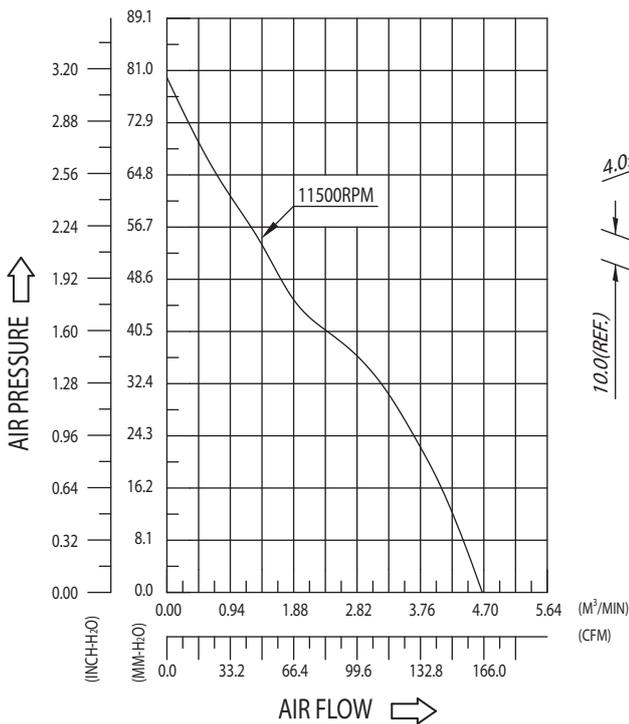

DC AXIAL FANS



DCTA SERIES

92×92×38 mm 12v,48v

- * Material: Impeller & Frame: Plastic (UL 94V-0)
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 9 Blades
- * Rotational direction CCW view from front face
- * Weight: 270g (9.52 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range		Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L ₁₀ @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A	hours	
DCTA0938_2M	-FG/RD	B	12	7 to 13.2	0.68	8.16	5700	2.544	89.83	18.66	0.735	53.1	140000	
DCTA0938_2H	-FG/RD	B	12	7 to 13.2	1.08	13.0	7000	3.163	111.71	28.47	1.121	58.7	130000	
* DCTA0938_2U	-FG/RD	B	12	7 to 13.2	1.60	19.2	8300	3.671	129.64	39.28	1.546	62.8	130000	
DCTA0938_8M	-FG/RD	B	48	36.0 to 56.0	0.18	8.64	5700	2.544	89.83	18.66	0.735	53.1	140000	
DCTA0938_8H	-FG/RD	B	48	36.0 to 56.0	0.25	12.0	7000	3.163	111.71	28.47	1.121	58.7	130000	
* DCTA0938_8U	-FG/RD	B	48	36.0 to 56.0	0.37	17.76	8300	3.671	129.64	39.28	1.546	62.8	130000	

