



# BLOWER DC FANS

## BAPB SERIES Ø70×15 mm

- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL1430 AWG#28 or Equivalent
- \* Impeller: 17 Blades
- \* Rotational direction CCW view from front face
- \* Weight: 40g (1.411 OZ)



MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Acoustic Noise	Life expectancy L <sub>10</sub> @40°C
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours
BAPB0715_5L	-FG / RD	B	5	4.5 to 5.5	0.17	0.85	3000	0.158	5.59	7.66	0.301	26.0	70000
BAPB0715_5M	-FG / RD	B	5	4.5 to 5.5	0.29	1.45	3600	0.192	6.80	10.63	0.418	31.0	70000

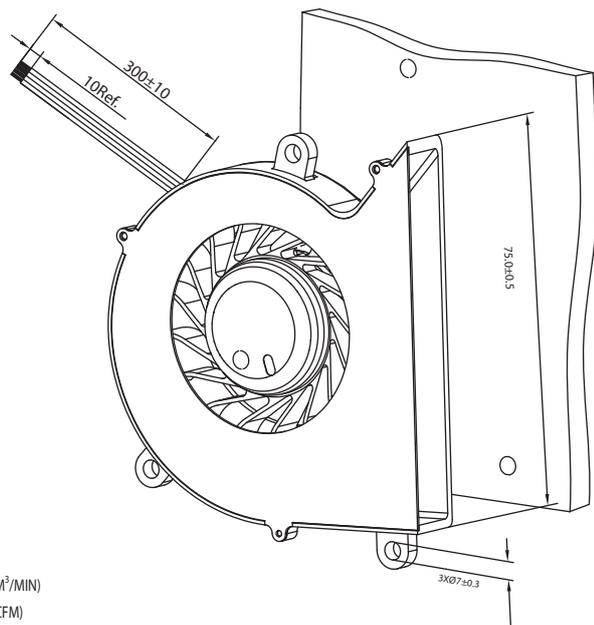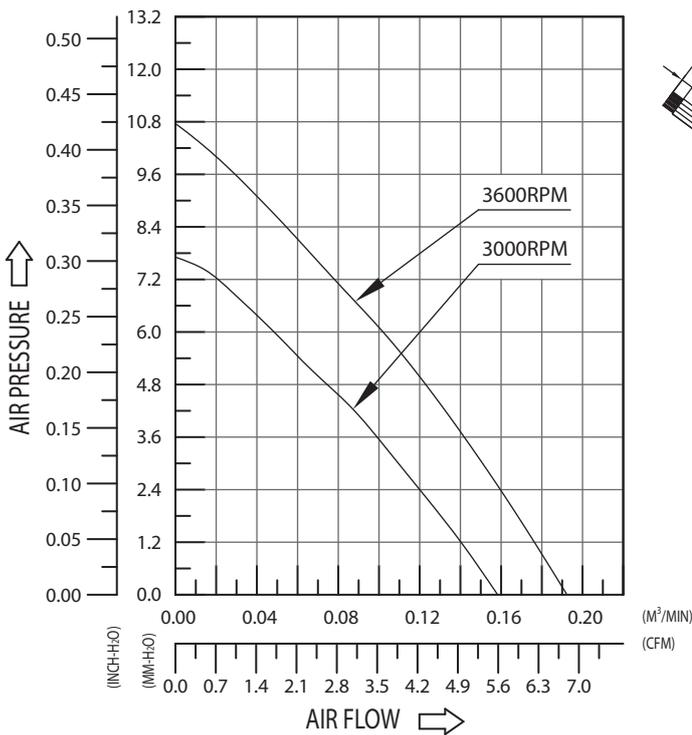

# BLOWER DC FANS

## BASA SERIES 70×70×15 mm



- \* Material: Impeller & Frame: Plastic (UL 94V-0)
- \* Lead Wires: UL 1061 AWG #28 or Equivalent
- \* Impeller: 43 Blades
- \* Rotational direction CW view from front face
- \* Weight: 60g (2.11 OZ)

MODEL		Bearing Type	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Acoustic Noise	Life expectancy L <sub>10</sub> @40°C		
PART NO.	SIGNAL	B.T.S.R	VDC	VDC	Amp	Watt	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A	hours
BASA0715_U	-FG / RD	B	12	7.0 to 13.2	0.70	8.40	6600	0.343	12.1	37.0	1.457	56.0	70000

